



Hives Lighting Limited

Add 1:Xueziwei Industrial Park,Shajing,Bao'ao District,Shenzhen,China

Add 2:Zhenggao Park,Xiaolan Town,Zhongshan,China

Tel:0755-27350487

Email:sales@hives-lighting.com

Web:www.hives-lighting.com



Web



Wechat

Catalogue 2026^{NEW}
HIVES LIGHTING

Company Profile



Original Design

Hives Lighting, specializes in designing and manufacturing led commercial lighting products including LED downlight, track light, grille light, suspended light, located in Shenzhen, the center of high quality LED lighting in China, with OEM/ODM ability.

Complete R&D, sales, QC/A, Production Team-With an experienced and professional R&D team, Hives keeps flexible, innovative and far-sighted, improving existing products and developing new products according to market's needs. There is an energetic and intelligent marketing and sales team, strictly reliable QC/A team and highly efficient production team as well. All teams in Hives are committed to providing high quality products with competitive price and superior service to customers all over the world.



Innovation • Value • Quality

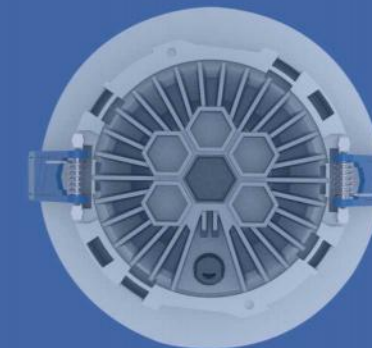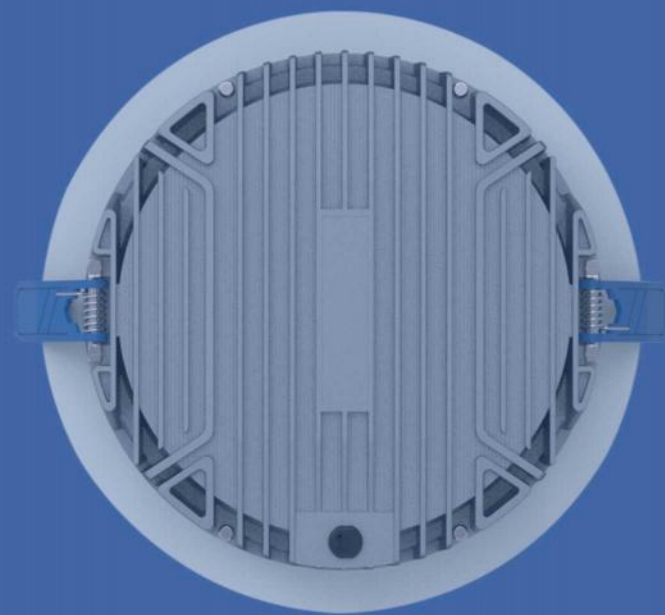

01 COB Downlight

W1  Pag. 03-04	W2  Pag. 05-06	A1  Pag. 09-10	F1  Pag. 11-12	F2  Pag. 13-14
F3  Pag. 15-16	F4  Pag. 17-18	F5  Pag. 19-20		

02 Downlight

P1  Pag. 21-22	P3  Pag. 23-24	P4  Pag. 25-26	V1  Pag. 27-28	V2  Pag. 29-30
---	---	---	---	---

03 Mounted Downlight

M1  Pag. 33-34	M2  Pag. 33-34	M6  Pag. 35-36	M7  Pag. 37-38	S2  Pag. 39-40
---	---	---	---	---

04 Track Light

Z1  Pag. 43-44	Z2  Pag. 45-46	C2  Pag. 47-48	C3  Pag. 49-50	C4  Pag. 51-52
C5  Pag. 53-54	C6  Pag. 55-56	C8  Pag. 55-56	C9  Pag. 57-58	

05 Grille Light

G1  Pag. 59-60		
---	---	---

06 Trunk Light

T1  Pag. 61-62

Wall Washer Family Key Feature

- 1. Best wall washer optic:** We have tested many brand of wall washer lens in the market, to select a best one to design our product.
- 2. Anti-glare:** More focus on anti-glare design, to do comfortable wall washer lighting.
- 3. Narrow Trim:** Narrow trim design makes looking more beautiful.



Reflector

Lens



2700K



3000K



4000K



6000K



Wall Washer W1 Series

Quick info

GENERAL
recessed
IP 20


LED
COB LED module
2700K 3000K 4000K 5700K
CRI > 80, CRI > 90
Bining < 3-Step MacAdam

ESTIMATED LED LIFETIME
L80/50000h

OPTICAL
direct illumination
beam angle

PHYSICAL
aluminum
powder coating

Installation ratio:
0.6:3:0.6



(Adjust according to the actual wall height)

Function

Small size with cutout of 90mm. Optimal lens technologies with flood. Integrated mechanicals of heatsink and beam angles guarantee light quality mounting ring to reduce components. Interchangeable reflectors of matt, Deep recessed design achieves super white and black colors provide eye comfort.


Attractive appearance with efficiency maximum design freedom and functionality.

Passive management ensures durability.



W1

COB Downlight

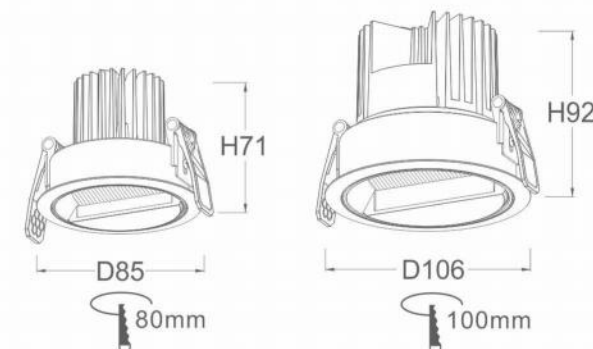


Beam Angle:



LED Chip: Citizen COB/ Bridgelux COB/ Philips COB

Profiles | Aluminium

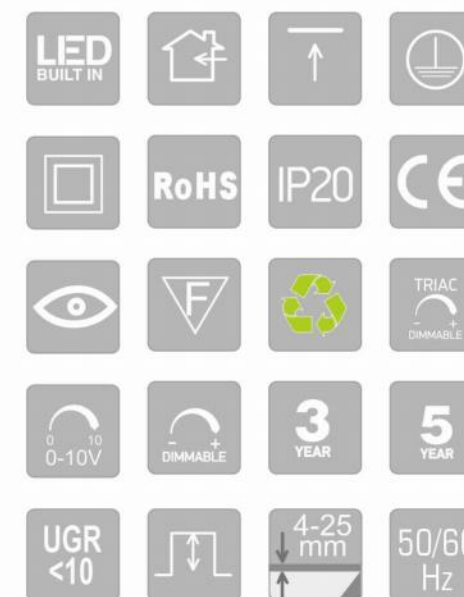


Order Code	Watts	System Lumen	CCT	CRI	Size	Cutout
HW03-W1-PL	5/7/10W	70-80lm/W	2700-5000K	80/90	D85*H71	80mm
HW04-W1-PL	15/20/25W	70-80lm/W	2700-5000K	80/90	D106*H92	100mm



Wall Washer W2 Series

Super anti-glare PRO wall washer specialist

UGR<6

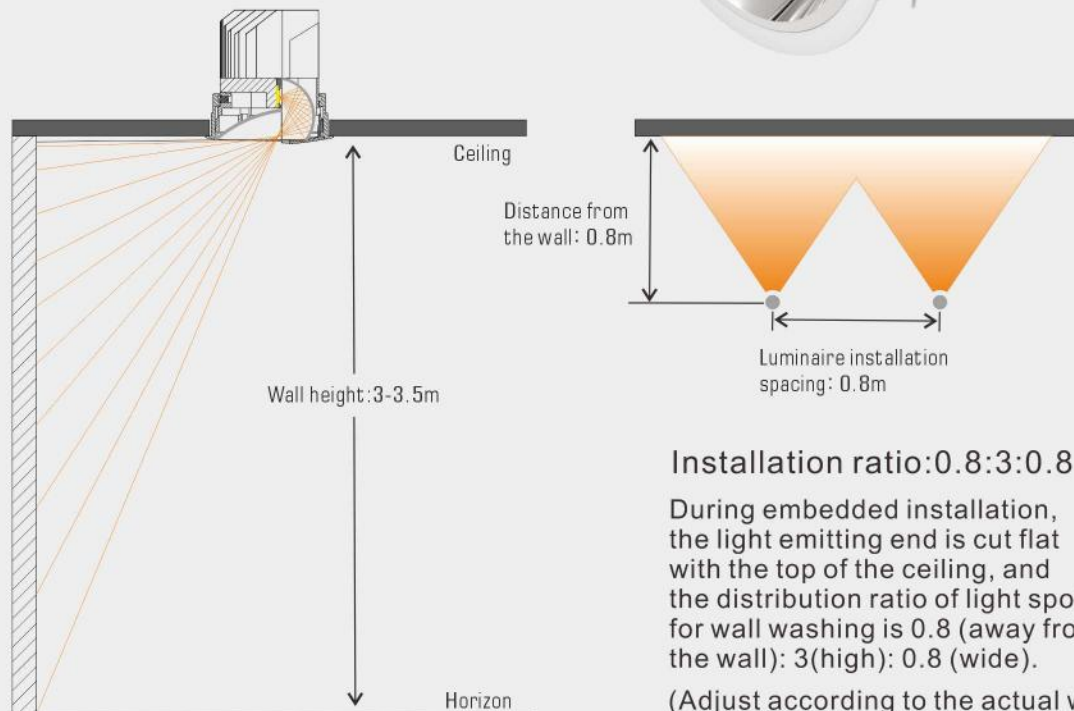


Installation ratio:0.8:3:0.8

During embedded installation, the light emitting end is cut flat with the top of the ceiling, and the distribution ratio of light spots for wall washing is 0.8 (away from the wall): 3(high): 0.8 (wide).

(Adjust according to the actual wall height)

W2


COB Downlight



LED Chip:Citizen COB/ Bridgelux COB

Die cast | Aluminium



Beam Angle:

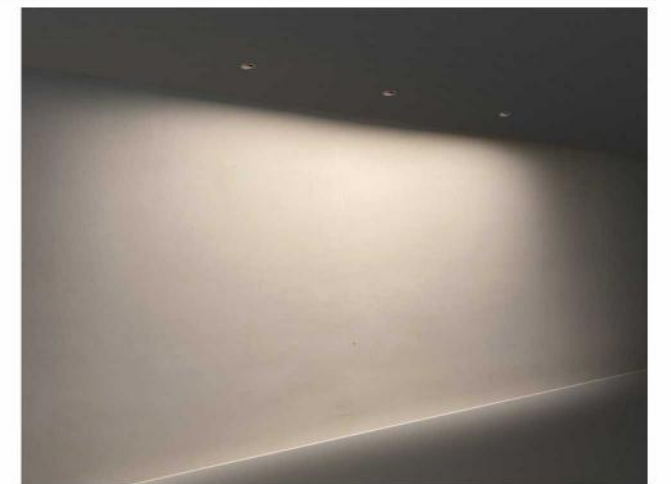

Order Code	Watts	System Lumen	CCT	CRI	Size	Cutout
HW02-W2-FR	5/7W	70-80lm/W	2700K-5000K	80/90	D62*H82	55
HW02-W2-FT	5/7W	70-80lm/W	2700K-5000K	80/90	L110*H82	55
HW03-W2-FR	10/15W	70-80lm/W	2700K-5000K	80/90	D80*H84	75
HW03-W2-FT	10/15W	70-80lm/W	2700K-5000K	80/90	L133*H84	75
HW04-W2-FR	15/25W	70-80lm/W	2700K-5000K	80/90	D105*H115	95
HW04-W2-FT	15/25W	70-80lm/W	2700K-5000K	80/90	L160*H115	95

COB Downlight Family Key Features

- 1. Ultra-Thin Bezel :** Blends perfectly with the ceiling for a sleek, modern look.
- 2. Waterproof Options:** Available in IP65/IP44/IP20, ensuring durability in various environments.
- 3. Customizable Anti-Glare Rings:** Different depths available to meet specific application needs, reducing glare effectively.
- 4. Flexible Face Ring Sizes:** Customize different sizes to match your project requirements.

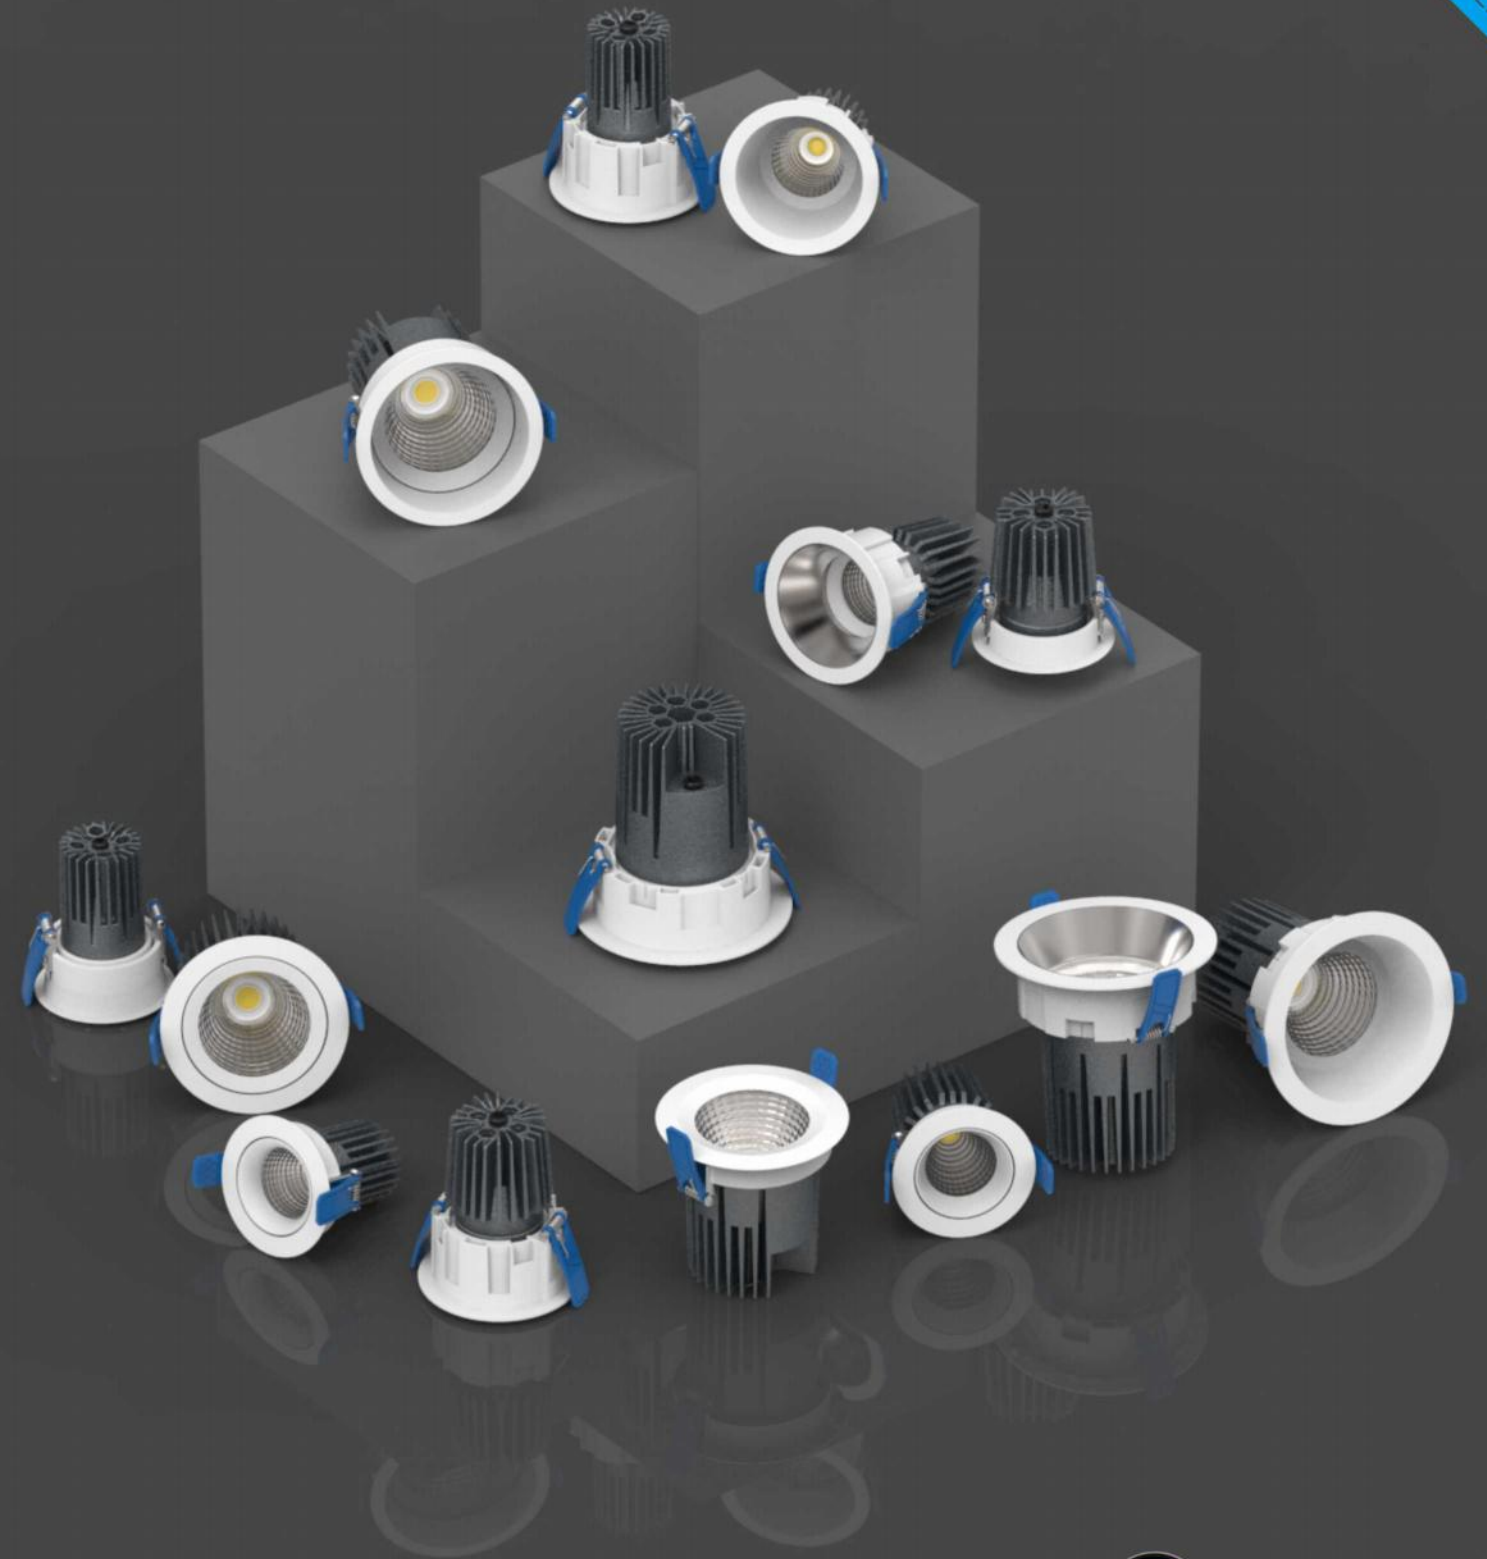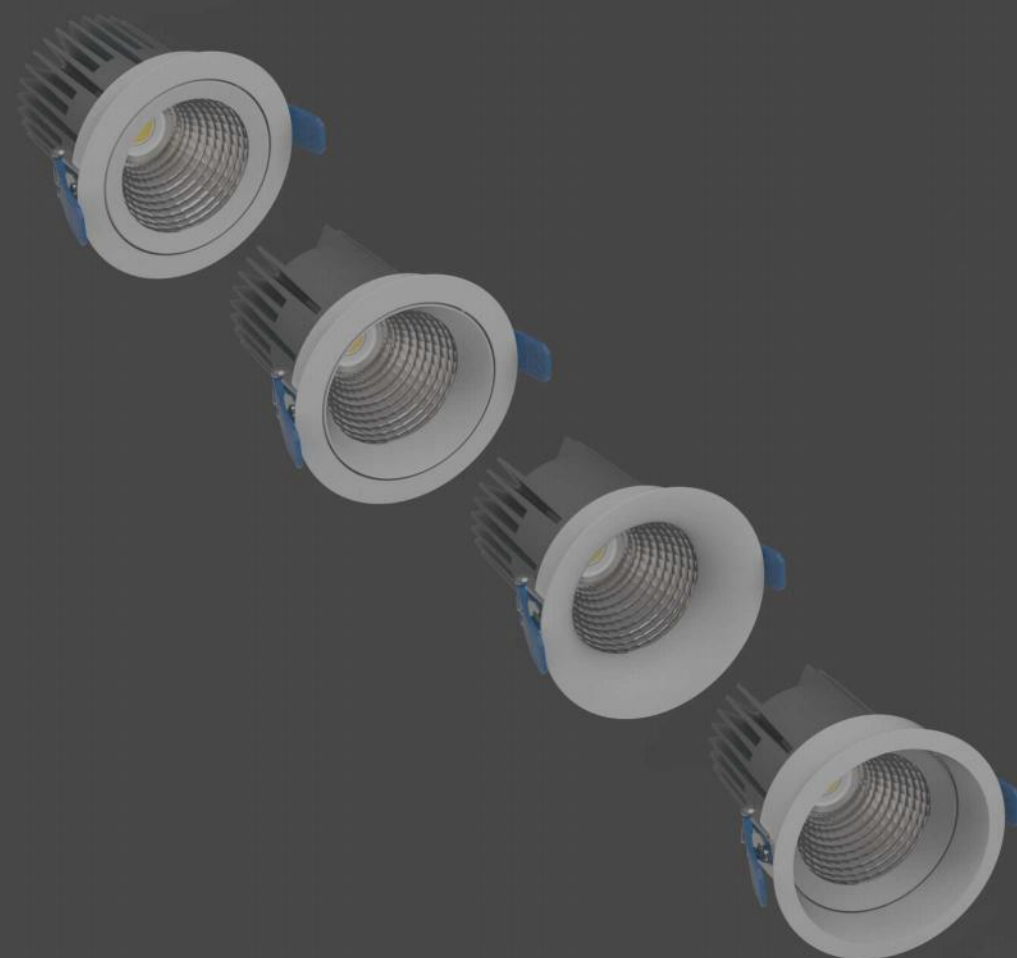

Reflector

15°	24°	36°	60°
			
2700K	3000K	4000K	6000K




■ Anti-glare Comfort A1 Series

Light is the soul of the building



IP65 IP44 IP20

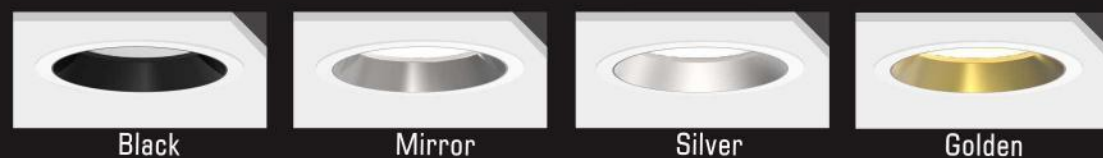

Black







Mirror

Silver

Golden

A1

COB Downlight

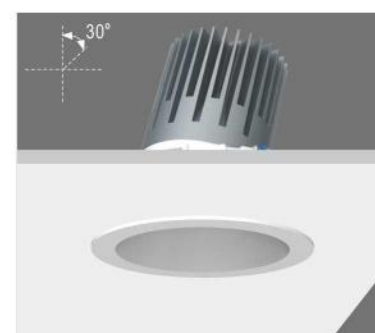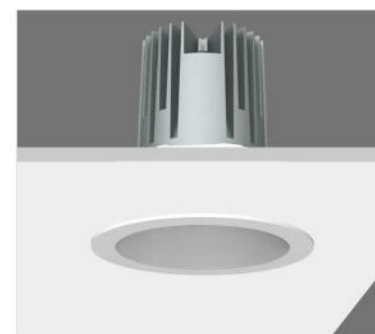

LED Chip: Citizen COB/ Bridgelux COB/ Philips COB


Die cast | Aluminium

System Lumen: 95-110lm/W

Beam Angle:



Order Code	Watts	Beam Angle	CCT	CRI	Size	Cutout
HC03-A1-FR	5/7/10W	15/24/36/60°	2700K-5000K	80/90/97	D90*H101	75-80
HC35-A1-FR	12/15W	15/24/36/60°	2700K-5000K	80/90/97	D90*H106	75-80
HC04-A1-FR	15/20/25/30W	15/24/36/60°	2700K-5000K	80/90/97	D126*H113	105-110
HC03-A1-AR	5/7/10W	15/24/36/60°	2700K-5000K	80/90/97	D90*H101	75-80
HC35-A1-AR	12/15W	15/24/36/60°	2700K-5000K	80/90/97	D90*H114	75-80
HC04-A1-AR	15/20/25/30W	15/24/36/60°	2700K-5000K	80/90/97	D126*H113	105-110

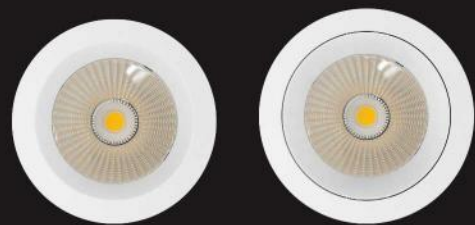

Flat Ring F1 Series






Fill the space with smooth brightness



IP65 IP44 IP20

F1

COB Downlight

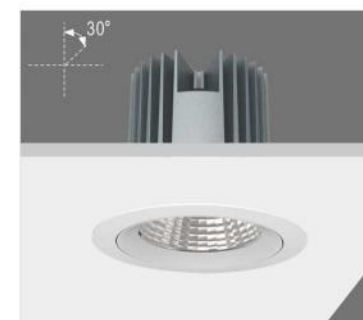

LED Chip: Citizen COB/ Bridgelux COB/ Philips COB

Die cast | Aluminium

System Lumen: 95-110lm/W

Beam Angle:



Order Code	Watts	Beam Angle	CCT	CRI	Size	Cutout
HC03-F1-FR	5/7/10W	15/24/36/60°	2700K-5000K	80/90/97	D80*H76	75
HC35-F1-FR	12/15W	15/24/36/60°	2700K-5000K	80/90/97	D80*H87	75
HC04-F1-FR	15/20/25/30W	15/24/36/60°	2700K-5000K	80/90/97	D106*H100	100
HC03-F1-AR	5/7/10W	15/24/36/60°	2700K-5000K	80/90/97	D80*H76	75
HC35-F1-AR	12/15W	15/24/36/60°	2700K-5000K	80/90/97	D80*H87	75
HC04-F1-AR	15/20/25/30W	15/24/36/60°	2700K-5000K	80/90/97	D106*H100	100



■ Slight Deep Ring F2 Series






Little bit hiding the light from ceiling



IP65 IP44 IP20

F2

COB Downlight

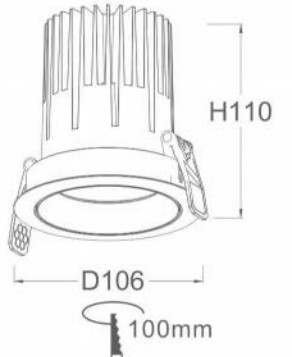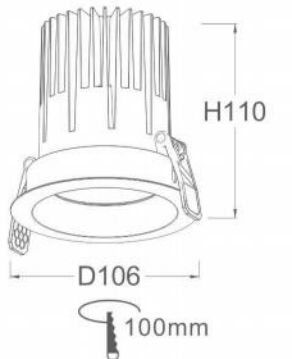

LED Chip: Citizen COB/ Bridgelux COB/ Philips COB

Die cast | Aluminium

System Lumen: 95-110lm/W

Beam Angle:



Order Code	Watts	Beam Angle	CCT	CRI	Size	Cutout
HC03-F2-FR	5/7/10W	15/24/36/60°	2700K-5000K	80/90/97	D80*H76	75
HC35-F2-FR	12/15W	15/24/36/60°	2700K-5000K	80/90/97	D80*H92	75
HC04-F2-FR	15/20/25/30W	15/24/36/60°	2700K-5000K	80/90/97	D106*H100	100
HC03-F2-AR	5/7/10W	15/24/36/60°	2700K-5000K	80/90/97	D80*H76	75
HC35-F2-AR	12/15W	15/24/36/60°	2700K-5000K	80/90/97	D80*H92	75
HC04-F2-AR	15/20/25/30W	15/24/36/60°	2700K-5000K	80/90/97	D106*H100	100



Curved Ring F3 Series







Let the light bezel join the ceiling smoothly



IP65 IP44 IP20

F3

COB Downlight

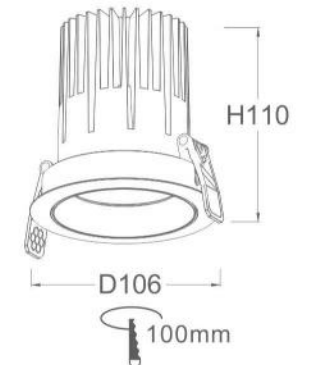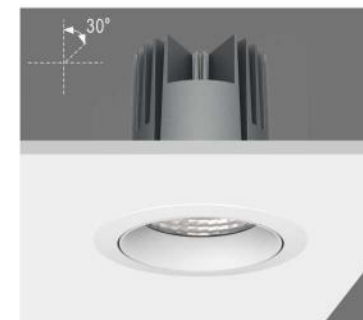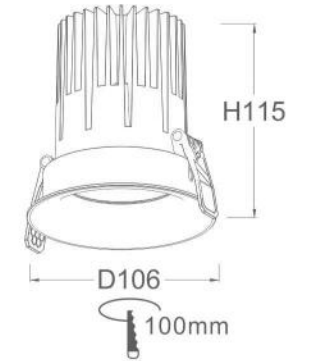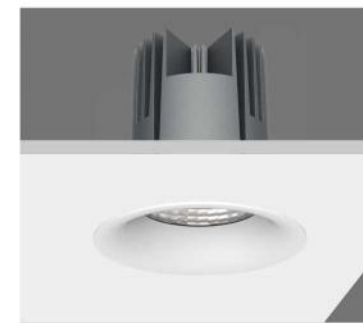


LED Chip: Citizen COB/ Bridgelux COB/ Philips COB

Die cast | Aluminium

System Lumen: 95-110lm/W


Beam Angle:

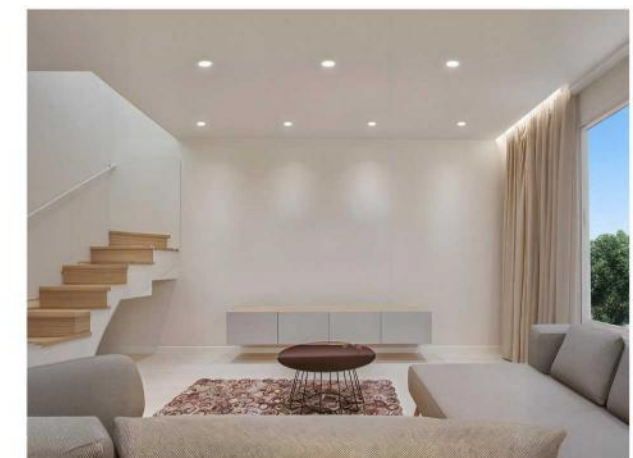

Order Code	Watts	Beam Angle	CCT	CRI	Size	Cutout
HC03-F3-FR	5/7/10W	15/24/36/60°	2700K-5000K	80/90/97	D80*H76	75
HC35-F3-FR	12/15W	15/24/36/60°	2700K-5000K	80/90/97	D80*H97	75
HC04-F3-FR	15/20/25/30W	15/24/36/60°	2700K-5000K	80/90/97	D106*H100	100
HC03-F3-AR	5/7/10W	15/24/36/60°	2700K-5000K	80/90/97	D80*H76	75
HC35-F3-AR	12/15W	15/24/36/60°	2700K-5000K	80/90/97	D80*H92	75
HC04-F3-AR	15/20/25/30W	15/24/36/60°	2700K-5000K	80/90/97	D106*H100	100

■ Small Beam Angle Spot Light F4 Series


Ultra-small beam angle with different optic filter option

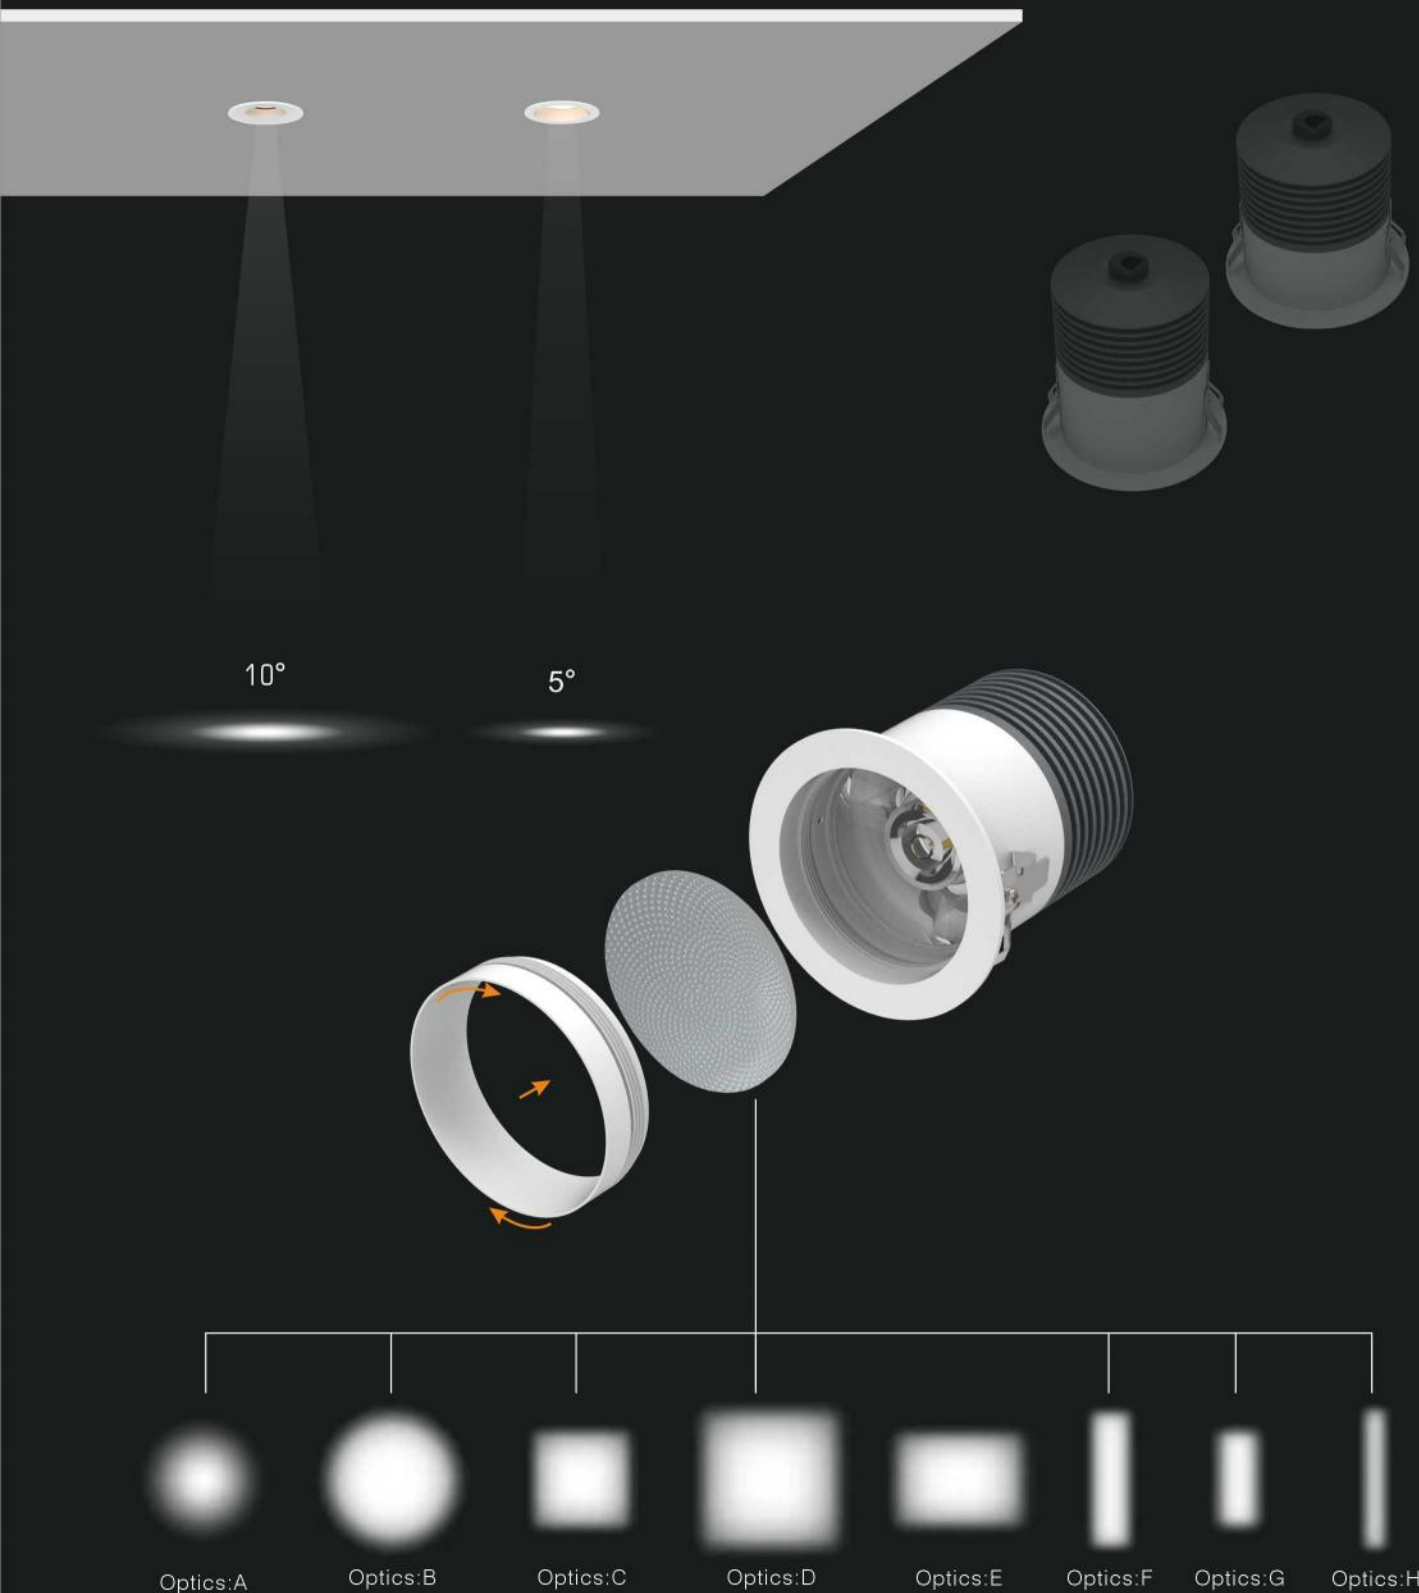

Optics:A Optics:B Optics:C Optics:D Optics:E Optics:F Optics:G Optics:H

F4

Spot Light

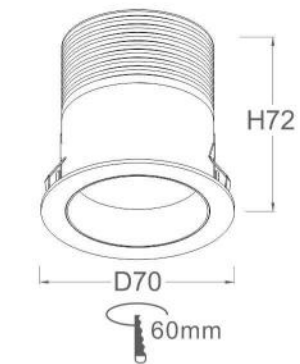


LED Chip:CREE SMD

Die cast | Aluminium

System Lumen: 50-70lm/W

Beam Angle:




Order Code	Watts	Beam Angle	CCT	CRI	Size	Cutout
HC25-F4-FS	7/10/12W	5°	2700K-5000K	90	D70*H72	60
HC25-F4-FL	7/10/12W	10°	2700K-5000K	90	D70*H64	60

Cross Lens Spot Light F5 Series

Close to trimless with mini hole in the ceiling makes beautiful lighting art



UGR<6

- 0.6mm ultra-thin bezel seamlessly blends with the ceiling.
- Small cutout, large light pattern.
- Deep focal length anti-glare trim design – the best solution for invisible light source visibility.
- Whole luminaire efficiency reaches up to 70%.

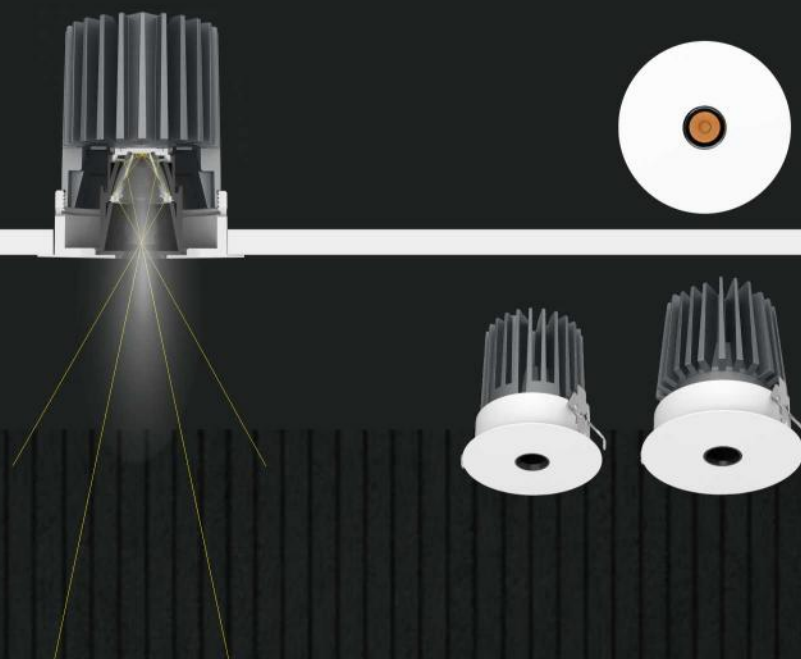

F5

COB Spot Light

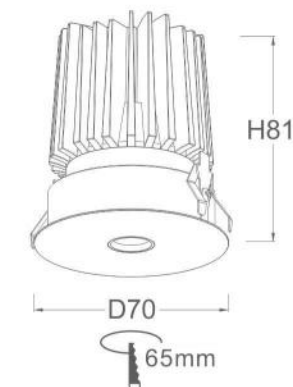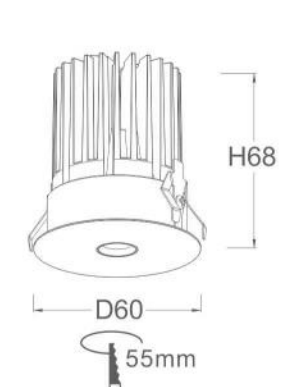

LED Chip: Bridgelux COB
Die cast | Aluminium
System Lumen: 40-50lm/W



Beam Angle:




Order Code	Watts	Beam Angle	CCT	CRI	Size	Light exit hole	Cutout
HC02-F5-FL	5/7W	24/36/50°	2700K-5000K	90/95	D60*H68	φ 11	55
HC25-F5-FL	10/12/15W	24/36/50°	2700K-5000K	90/95	D70*H81	φ 13.5	65

Basic Downlight Family Key Features

- 1. Efficient Heat Dissipation:** Advanced layout ensures better heat management compared to similar products.
- 2. Flexible Power & Size Options:** Full power up to 40W and 4 size to meet diverse scene requirements. Choose COB/SMD for customized solutions.
- 3. Waterproof Options:** Available in IP65, IP44, and IP20 ratings for indoor and outdoor use.

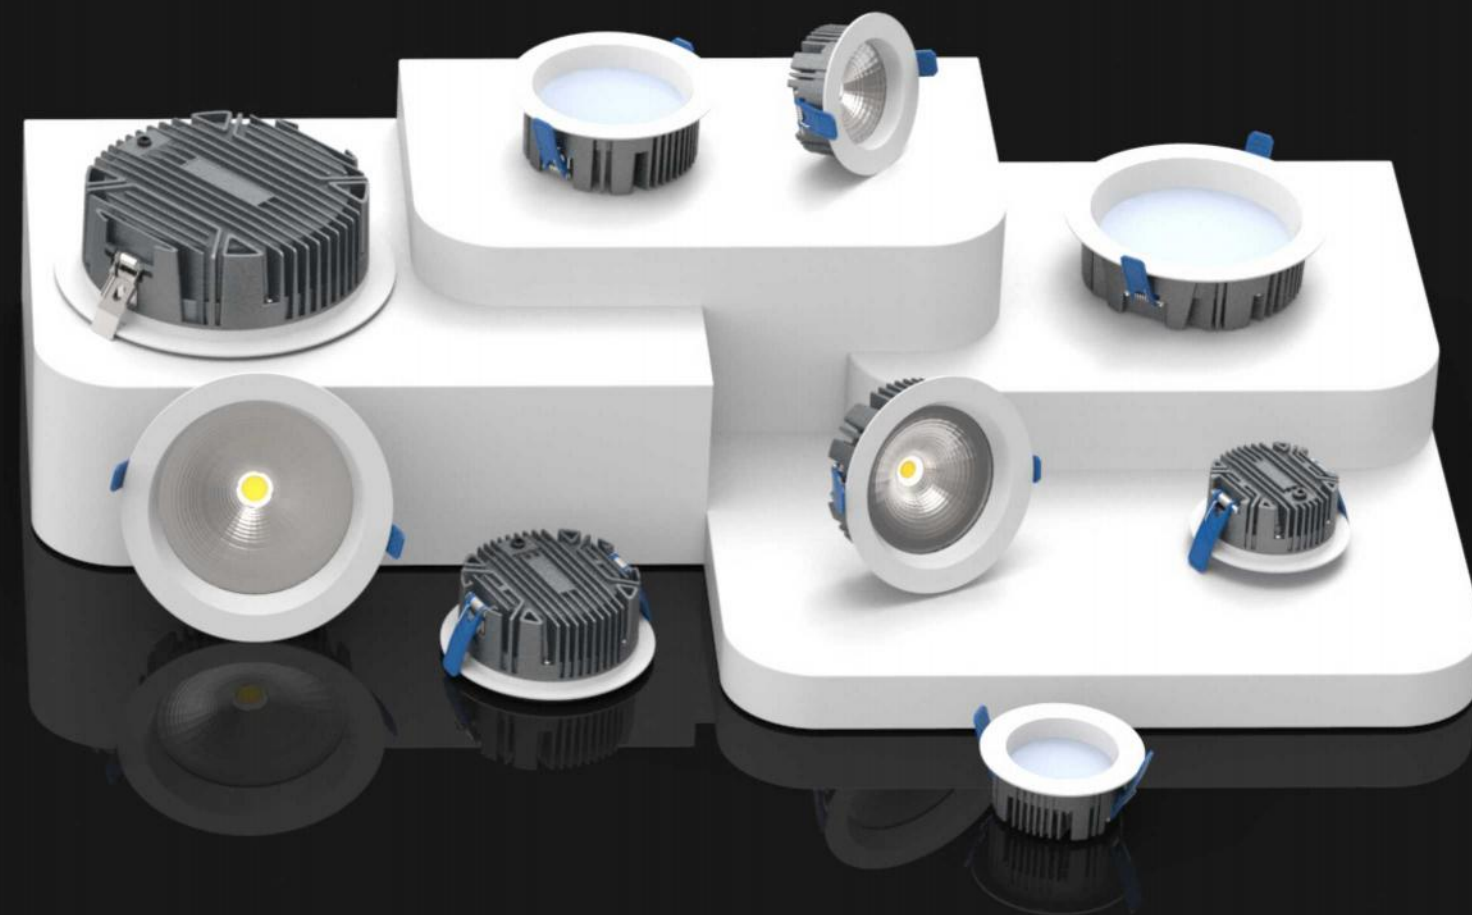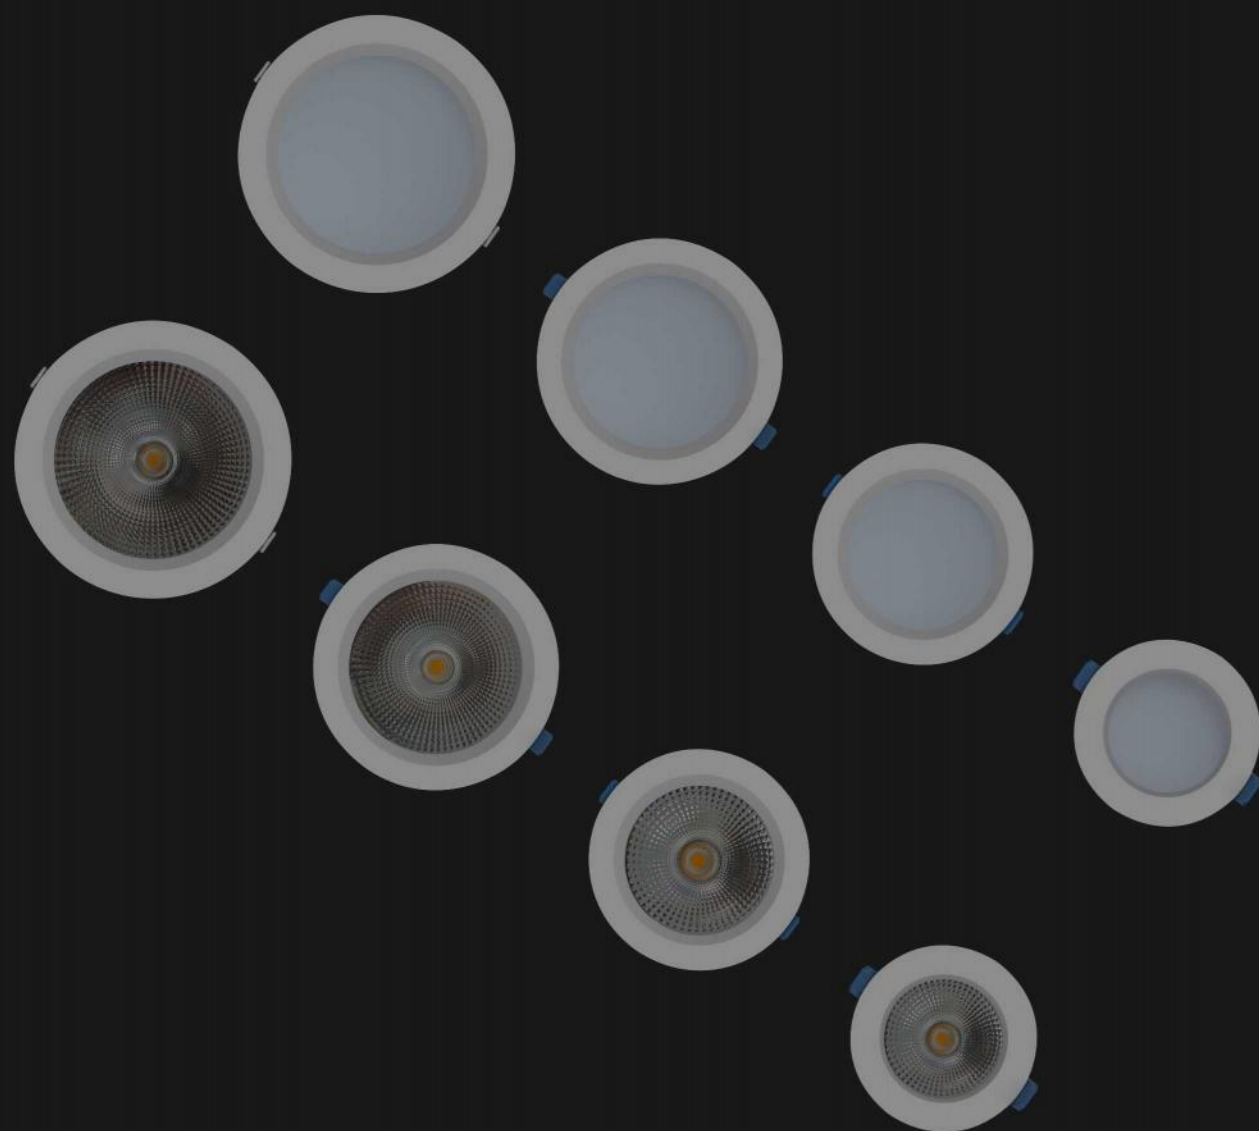

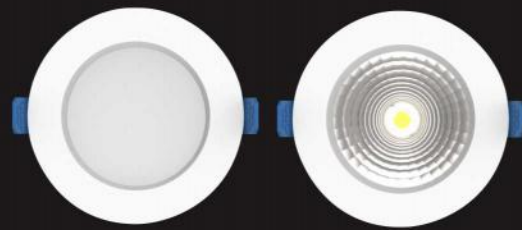

■ Pretty Soul P1 Series

Soul comes from the design



SMD / COB



IP65 IP44 IP20

P1

Downlight Range



LED Chip: Samsung LED / Sanan SMD

Citizen COB/ Bridgelux COB/ Philips COB

Die cast | Aluminium

System Lumen: 90-110lm/W

Beam Angle:




Order Code	Watts	Beam Angle	CCT	CRI	Size	Cutout
HD03-P1-RR	7/10/15W	60°	2700K-6000K	80/90	D106*H42	90
HD03-P1-DR	7/10/15W	90°	2700K-6000K	80/90	D106*H42	90
HD04-P1-RR	10/15/20W	60°	2700K-5000K	80/90	D142*H50	120
HD04-P1-DR	10/15/20W	90°	2700K-6000K	80/90	D142*H50	120
HD06-P1-RR	20/25/30W	60°	2700K-5000K	80/90	D180*H60	160
HD06-P1-DR	20/25/30W	90°	2700K-6000K	80/90	D180*H60	160
HD08-P1-RR	30/35/40W	60°	2700K-5000K	80/90	D230*H65	200
HD08-P1-DR	30/35/40W	90°	2700K-6000K	80/90	D230*H65	200




■ Super Narrow Trim P3 Series

Super comfortable impression lighting

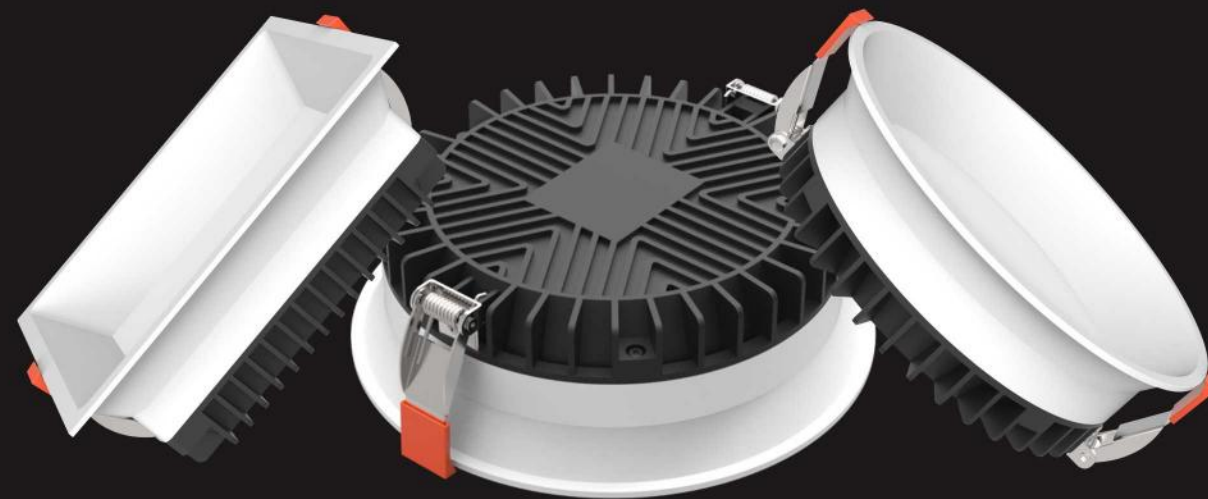

P3

Downlight Range

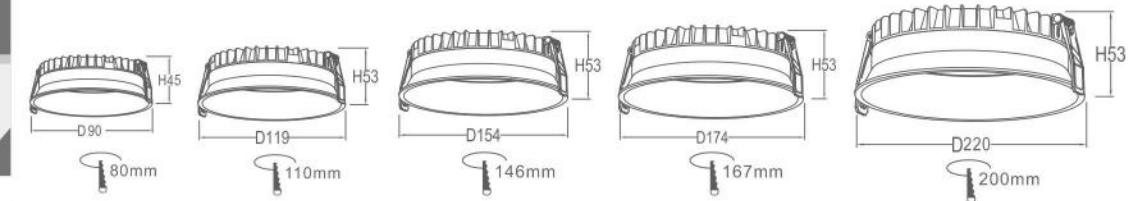

LED Chip: Samsung LED / Sanan SMD

Die cast | Aluminium

System Lumen: 90-100lm/W


Beam Angle:



Order Code	Watts	Beam Angle	CCT	CRI	Size	Cutout
HD03-P3-DR	5/7/10W	90°	2700K-6000K	80/90	D90*H45	80
HD04-P3-DR	7/10/15W	90°	2700K-6000K	80/90	D119*H53	110
HD05-P3-DR	15/20/25W	90°	2700K-6000K	80/90	D154*H53	146
HD06-P3-DR	20/25/30W	90°	2700K-6000K	80/90	D174*H53	167
HD08-P3-DR	20/30/40W	90°	2700K-6000K	80/90	D220*H53	200
HD04-P3-DS	7/10/15W	90°	2700K-6000K	80/90	L110*W110*H50	102*102
HD05-P3-DS	15/20/25W	90°	2700K-6000K	80/90	L145*W145*H50	136*136
HD06-P3-DS	20/25/30W	90°	2700K-6000K	80/90	L170*W170*H50	160*160


■ Pretty Flat P4 Series

Super thin lighting

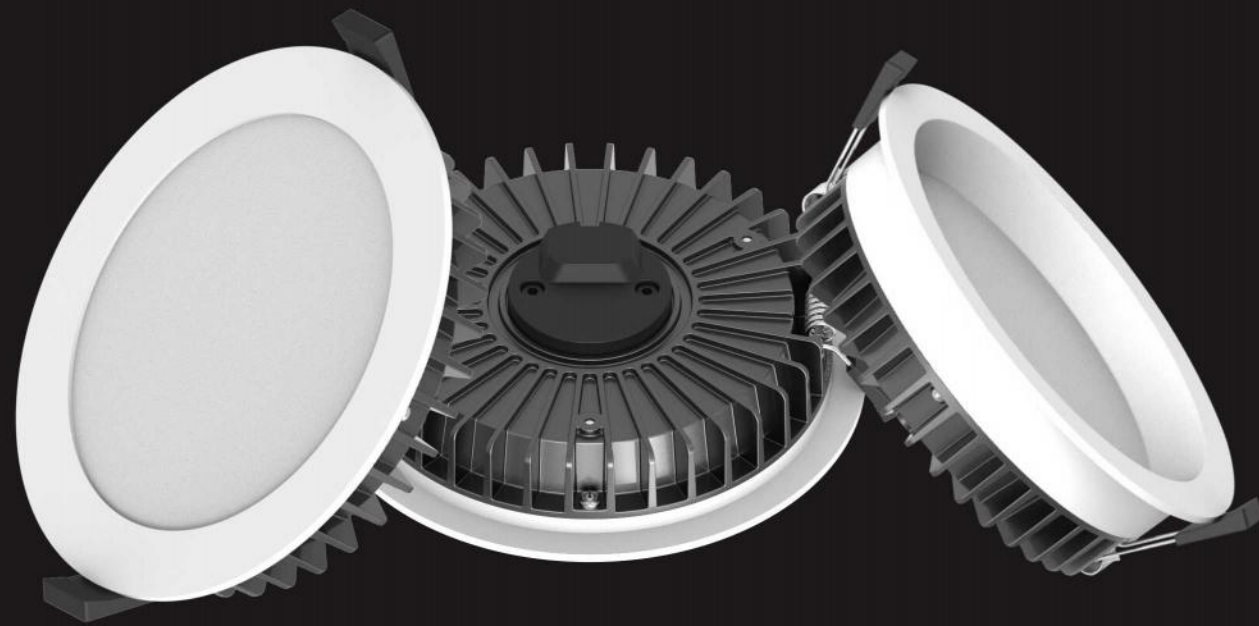

P4

Downlight Range

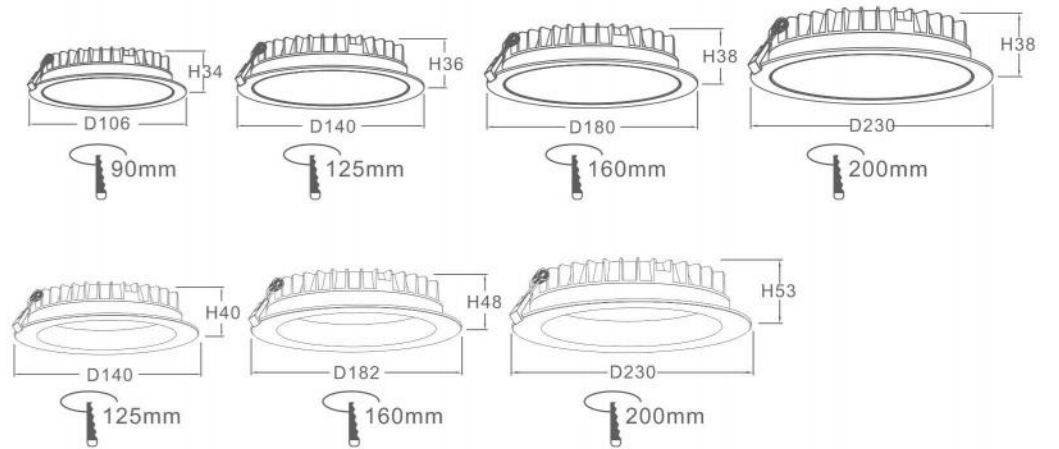

LED Chip: Samsung LED / Sanan SMD

Die cast | Aluminium

System Lumen: 100-115lm/W

Beam Angle:




Order Code	Watts	Beam Angle	CCT	CRI	Size	Cutout
HD03-P4-FR	7/10W	90°	2700K-6000K	80/90	D106*H34	90
HD04-P4-FR	10/15W	90°	2700K-6000K	80/90	D140*H36	125
HD06-P4-FR	15/20/25W	90°	2700K-6000K	80/90	D180*H38	160
HD08-P4-FR	20/25/30W	90°	2700K-6000K	80/90	D230*H38	200
HD04-P4-DR	10/15W	90°	2700K-6000K	80/90	D140*H40	125
HD06-P4-DR	15/20/25W	90°	2700K-6000K	80/90	D182*H48	160
HD08-P4-DR	20/25/30W	90°	2700K-6000K	80/90	D230*H53	200




■ Vintage Downlight V1 Series **SMD / COB**

Eternal classic style always beside you

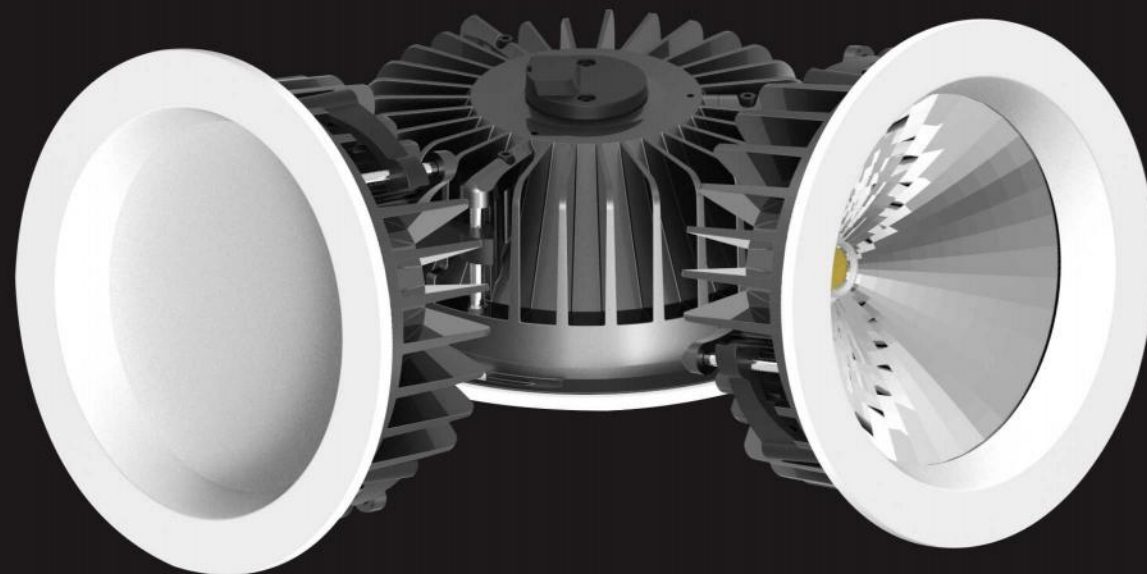

V1

Downlight Range

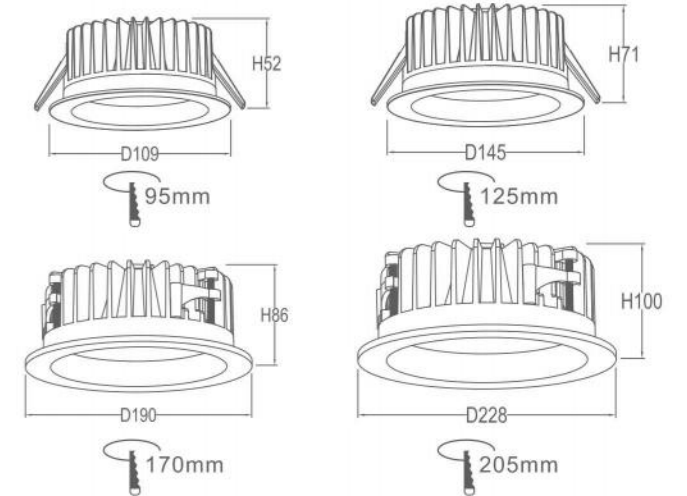

LED Chip: Samsung LED / Sanan SMD

Citizen COB/ Bridgelux COB/Philips COB

Die cast | Aluminium

System Lumen: 90-105lm/W

Beam Angle:



Order Code	Watts	Beam Angle	CCT	CRI	Size	Cutout
HD03-V1-D/R	7/10/15W	60°/90°	2700K-6000K	80/90	D109*H52	95
HD04-V1-D/R	10/15/20W	60°/90°	2700K-6000K	80/90	D145*H71	125
HD06-V1-D/R	20/25/30W	60°/90°	2700K-6000K	80/90	D190*H86	170
HD08-V1-D/R	25/30/40W	60°/90°	2700K-6000K	80/90	D228*H100	205



ECO Vintage Downlight V2 Series SMD / COB


Eternal classic style always beside you



IP65 IP44 IP20

V2

Downlight Range

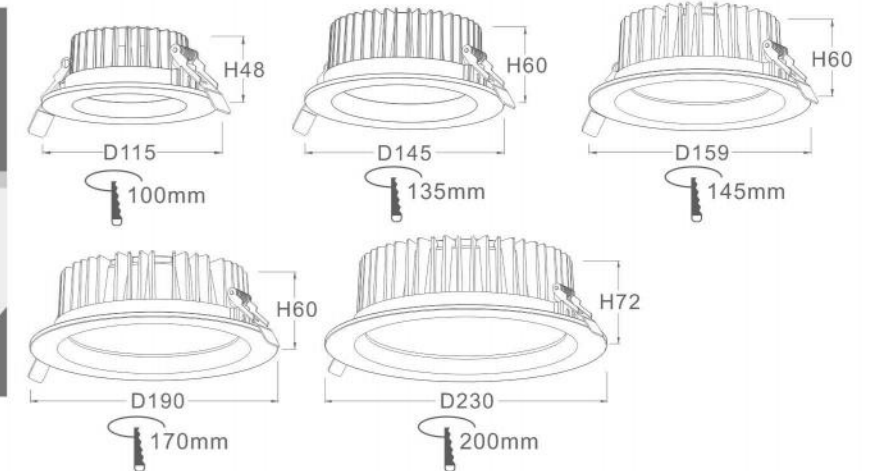

LED Chip: Samsung LED / Sanan SMD

Citizen COB/ Bridgelux COB/Philips COB

Die cast | Aluminium

System Lumen: 90-105lm/W



Beam Angle:



Order Code	Watts	Beam Angle	CCT	CRI	Size	Cutout
HD03-V2-D	5/7/10W	90°	2700K-6000K	80/90	D115*H48	95
HD04-V2-D	7/10/15W	90°	2700K-6000K	80/90	D145*H60	120
HD05-V2-D	10/15/20W	90°	2700K-6000K	80/90	D159*H60	140
HD06-V2-D	20/25/30W	90°	2700K-6000K	80/90	D190*H60	165
HD08-V2-D	25/30/40W	90°	2700K-6000K	80/90	D230*H72	200
HD03-V2-R	5/7/10W	60°/90°	2700K-6000K	80/90	D115*H48	95
HD04-V2-R	7/10/15W	60°/90°	2700K-6000K	80/90	D145*H60	125
HD05-V2-R	10/15/20W	60°/90°	2700K-6000K	80/90	D159*H60	140
HD06-V2-R	20/25/30W	60°/90°	2700K-6000K	80/90	D190*H60	165
HD08-V2-R	25/30/40W	60°/90°	2700K-6000K	80/90	D230*H72	200

Mounted Downlight Family Key Features

- 1. Complete Power & Size Options:** Choose from round or square designs, with flexible installation methods (surface-mounted or recessed).
- 2. Waterproof Options:** Available in IP65, IP44, and IP20 ratings for indoor and outdoor use.
- 3. Customizable Reflectors:** Swap for different colored reflective cups to match your design needs.

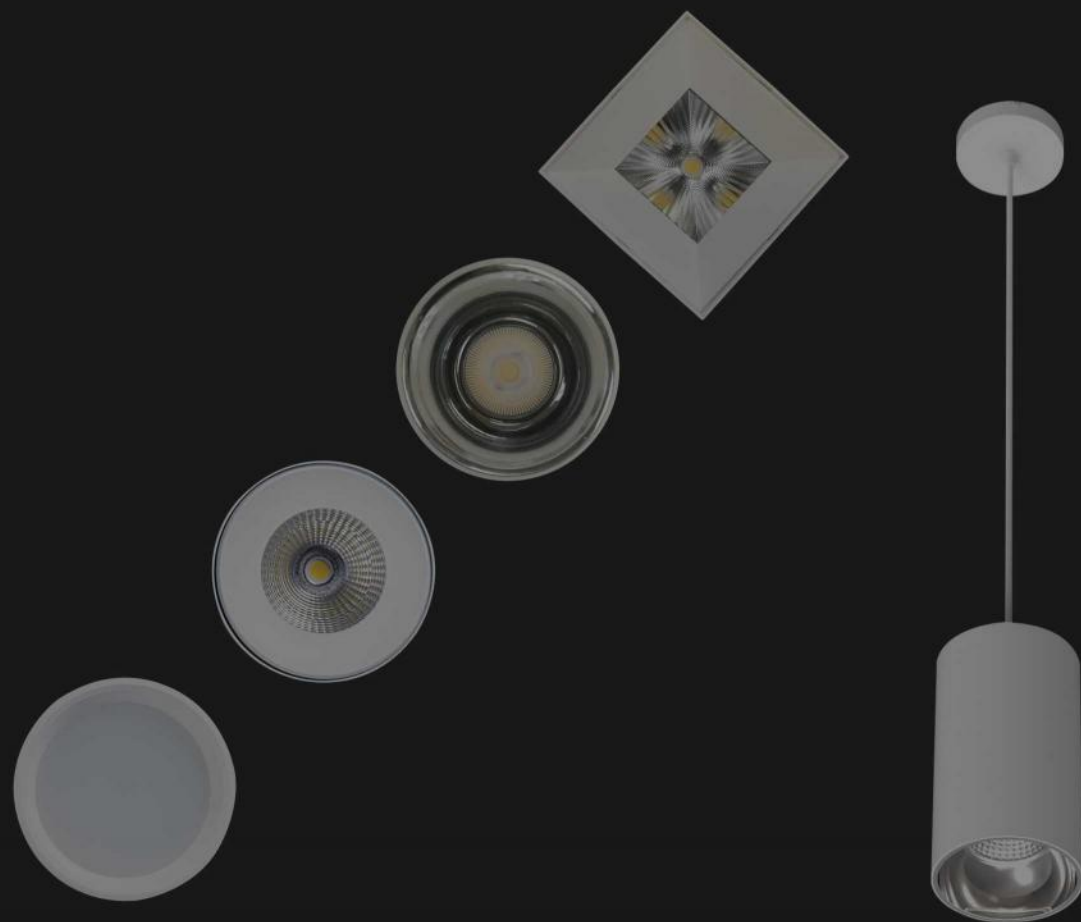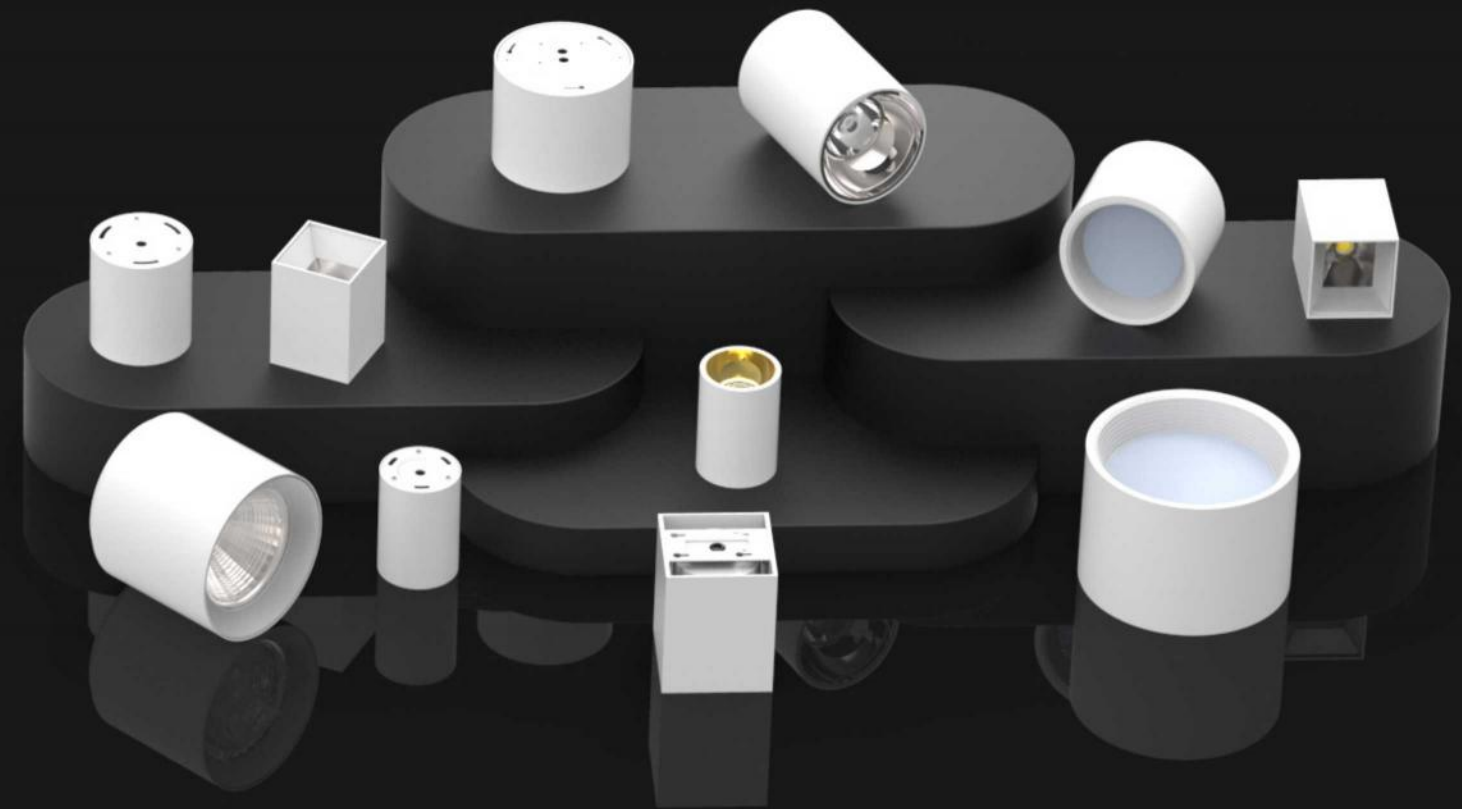




■ Mounted M1 M2 Series **SMD / COB**

Nature and decent showing a beauty of simple



M1/M2

Mounted Downlight Range

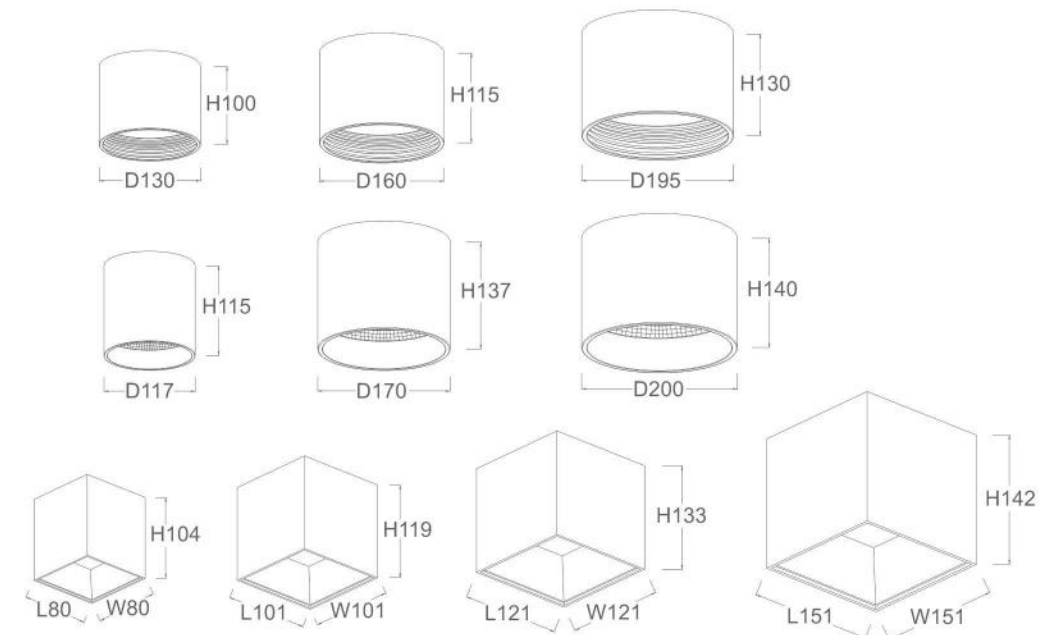


LED Chip: Samsung LED / Sanan SMD

Citizen COB/ Bridgelux COB/ Philips COB

Profiles | Aluminium

System Lumen: 90-100lm/W

Beam Angle:



Order Code	Watts	Beam Angle	CCT	CRI	Size
HM04-M1-D	10/15W	90°	2700K-6000K	80/90	D130*H100
HM06-M1-D	15/20W	90°	2700K-6000K	80/90	D160*H115
HM08-M1-D	25/30W	90°	2700K-6000K	80/90	D195*H130
HM04-M1-R	10/15W	60°	2700K-5000K	80/90	D117*H115
HM06-M1-R	15/20W	60°	2700K-5000K	80/90	D170*H137
HM08-M1-R	20/25W	60°	2700K-5000K	80/90	D200*H140
HM04-M2-R	7/10W	38°	2700K-5000K	80/90	L80*W80*H104
HM05-M2-R	10/15W	38°	2700K-5000K	80/90	L101*W101*H119
HM06-M2-R	15/20W	38°	2700K-5000K	80/90	L121*W121*H133
HM08-M2-R	20/30W	38°	2700K-5000K	80/90	L151*W151*H142



■ Mounted M6 Series IP65

rating, meet all kinds of projects



Black



White




Mirror



Golden

M6

Mounted Downlight Range

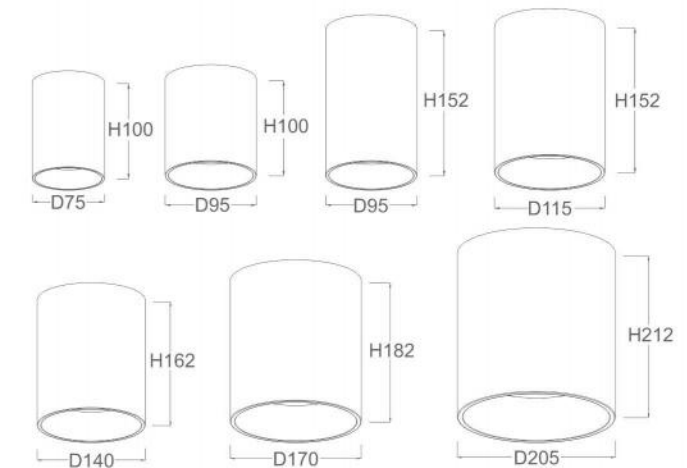

LED Chip: Samsung LED / Sanan SMD

Citizen COB/ Bridgelux COB/ Philips COB

Die cast | Aluminium

System Lumen: 85-95lm/W

Beam Angle:



Order Code	Watts	Beam Angle	CCT	CRI	Size
HM02-M6-L	7/10W	20/40/60°	2700K-5000K	80/90	D75*H100
HM03-M6-L	10/15W	20/40/60°	2700K-5000K	80/90	D95*H100
HM35-M6-L	15/20W	20/40/60°	2700K-5000K	80/90	D95*H152
HM04-M6-L	20/25W	20/40/60°	2700K-5000K	80/90	D115*H152
HM05-M6-L	25/30W	20/40/60°	2700K-5000K	80/90	D140*H162
HM06-M6-L	40/50W	20/40/60°	2700K-5000K	80/90	D170*H182
HM08-M6-L	50/60W	20/30/45/60°	2700K-5000K	80/90	D205*H212





■ Mounted M7 Series

Classic high efficiency surface mounted COB downlight



M7

Mounted Downlight Range

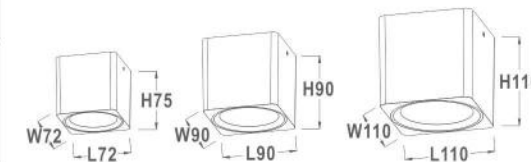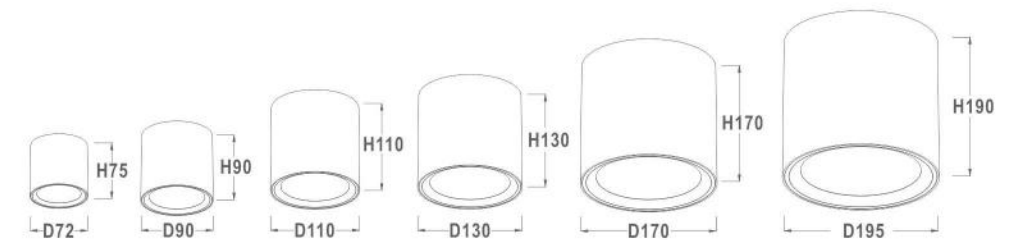

LED Chip: Citizen COB/ Bridgelux COB/Philips COB

Die cast | Aluminium

System Lumen: 100-105lm/W

Beam Angle:



Order Code	Watts	Beam Angle	CCT	CRI	Size
HM02-M7-RR	7/10W	20/40/60°	2700K-5000K	80/90	D72*H75
HM03-M7-RR	10/15W	20/40/60°	2700K-5000K	80/90	D90*H90
HM04-M7-RR	20/25W	20/40/60°	2700K-5000K	80/90	D110*H110
HM05-M7-RR	25/30W	20/40/60°	2700K-5000K	80/90	D130*H130
HM06-M7-RR	30/40W	20/40/60°	2700K-5000K	80/90	D170*H170
HM08-M7-RR	40/50W	20/40/60°	2700K-5000K	80/90	D195*H190
HM02-M7-RS	7/10W	20/40/60°	2700K-5000K	80/90	D72*H75
HM03-M7-RS	10/15W	20/40/60°	2700K-5000K	80/90	D90*H90
HM04-M7-RS	20/25W	20/40/60°	2700K-5000K	80/90	D110*H110




Suspended S2 Series

Amazing focus for top lighting



S2

Mounted Downlight Range

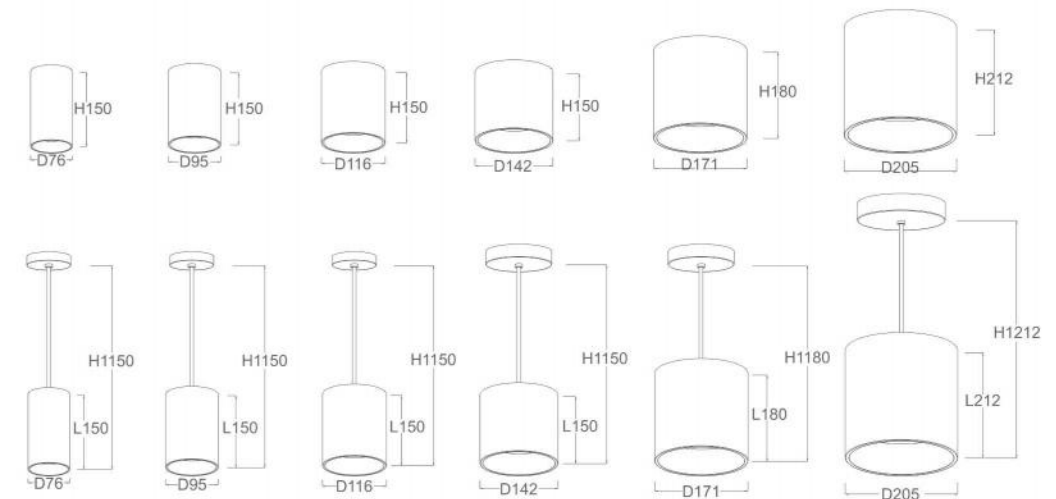

LED Chip: Citizen COB/ Bridgelux COB/ Philips COB

Die cast | Aluminium

System Lumen: 85-95lm/W

Beam Angle:



Order Code	Watts	Beam Angle	CCT	CRI	Size
HP76-S2-RM	10/15W	45°	2700K-5000K	80/90	D76*L150
HP95-S2-RM	15/20W	45°	2700K-5000K	80/90	D95*L150
HP11-S2-RM	20/25W	45°	2700K-5000K	80/90	D116*L150
HP14-S2-RM	30/40W	45°	2700K-5000K	80/90	D142*L150
HP17-S2-RM	40/50W	45°	2700K-5000K	80/90	D171*L180
HP20-S2-RM	60/80W	45°	2700K-5000K	80/90	D205*L212
HP76-S2-RS	10/15W	45°	2700K-5000K	80/90	D76*L150*H1150
HP95-S2-RS	15/20W	45°	2700K-5000K	80/90	D95*L150*H1150
HP11-S2-RS	20/25W	45°	2700K-5000K	80/90	D116*L150*H1150
HP14-S2-RS	30/40W	45°	2700K-5000K	80/90	D142*L150*H1150
HP17-S2-RS	40/50W	45°	2700K-5000K	80/90	D171*L180*H1180
HP20-S2-RS	60/80W	45°	2700K-5000K	80/90	D205*L212*H1212

Track Light Family Key Features

- 1. Flexible Installation Options:** Multiple mounting methods for diverse architectural and retail applications.
- 2. Adjustable Beam Angle:** 15°-60° zoom lens for precise spot to floodlight transition, ensuring optimal illumination.
- 3. Smart Dimming Control:** Supports silicon dimming, 0/1-10V, and DALI dimming for tailored lighting effects.
- 4. Customizable Color Temperature :** Choose from DIP switch color adjustment or intelligent dimming for dynamic lighting control.



Reflector Lens

15°	24°	36°	60°
			
2700K	3000K	4000K	6000K

Zoomable Specialist Z1 Series

Graceful appearance with full mounted style



15°-60° Zoomable Track Light



Unique Design




Dim Option:



DALI/ 1-10V/ Triac etc

Z1

Track Light Range

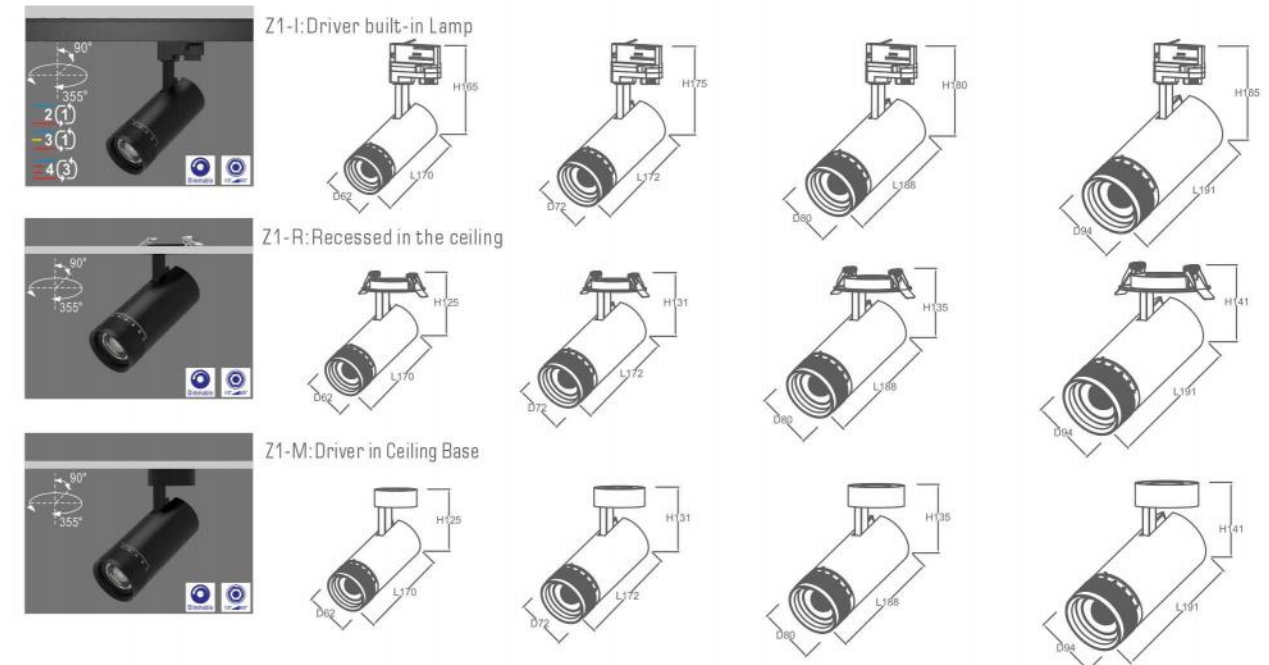

LED Chip: Citizen COB/ Bridgelux COB/ Philips COB

Profiles | Aluminium

System Lumen: 90-100lm/W

Beam Angle:



Order Code	Watts	Beam Angle	CCT	CRI	Size	Cutout
HT62-Z1-I	7/10/15W	15-60°	2700K-5000K	80/90/97	D62*L170*H165	
HT62-Z1-R	7/10/15W	15-60°	2700K-5000K	80/90/97	D62*L170*H125	75
HT62-Z1-M	7/10/15W	15-60°	2700K-5000K	80/90/97	D62*L170*H125	
HT72-Z1-I	10/15/20W	15-60°	2700K-5000K	80/90/97	D72*L172*H175	
HT72-Z1-R	10/15/20W	15-60°	2700K-5000K	80/90/97	D72*L172*H131	75
HT72-Z1-M	10/15/20W	15-60°	2700K-5000K	80/90/97	D72*L172*H131	
HT80-Z1-I	20/25/30W	15-60°	2700K-5000K	80/90/97	D80*L188*H180	
HT80-Z1-R	20/25/30W	15-60°	2700K-5000K	80/90/97	D80*L188*H135	100
HT80-Z1-M	20/25/30W	15-60°	2700K-5000K	80/90/97	D80*L188*H135	
HT94-Z1-I	30/35/40W	15-60°	2700K-5000K	80/90/97	D94*L191*H185	
HT94-Z1-R	30/35/40W	15-60°	2700K-5000K	80/90/97	D94*L191*H141	120
HT94-Z1-M	30/35/40W	15-60°	2700K-5000K	80/90/97	D94*L191*H141	

Zoomable Specialist Z2 Series


Born to search for art lighting



Z2

Track Light Range

Z: Zoom lens module L: Lens module R: Reflective cup module

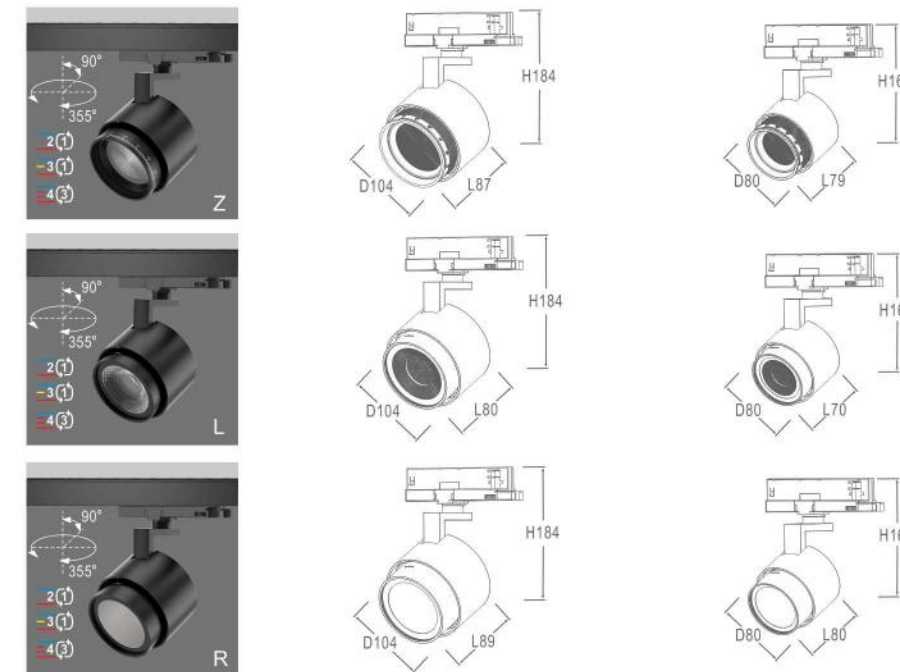

LED Chip: Citizen COB/ Bridgelux COB/ Philips COB

Profiles | Aluminium

System Lumen: 80-100lm/W

Beam Angle:




Order Code	Watts	Beam Angle	CCT	CRI	Size
HT10-Z2-DZ	20/25/30W	10-60°	2700K-5000K	80/90/97	D104*L87*H184
HT80-Z2-DZ	10/15/20W	10-60°	2700K-5000K	80/90/97	D80*L79*H160
HT10-Z2-DL	20/25/30W	15/24/36/60°	2700K-5000K	80/90/97	D104*L80*H184
HT80-Z2-DL	10/15/20W	15/24/36/60°	2700K-5000K	80/90/97	D80*L70*H160
HT10-Z2-DR	20/25/30W	15/24/36/60°	2700K-5000K	80/90/97	D104*L89*H184
HT80-Z2-DR	10/15/20W	15/24/36/60°	2700K-5000K	80/90/97	D80*L80*H160


■ Simple smooth C2 Series
Create a warm&sweet lighting



C2
Track Light Range

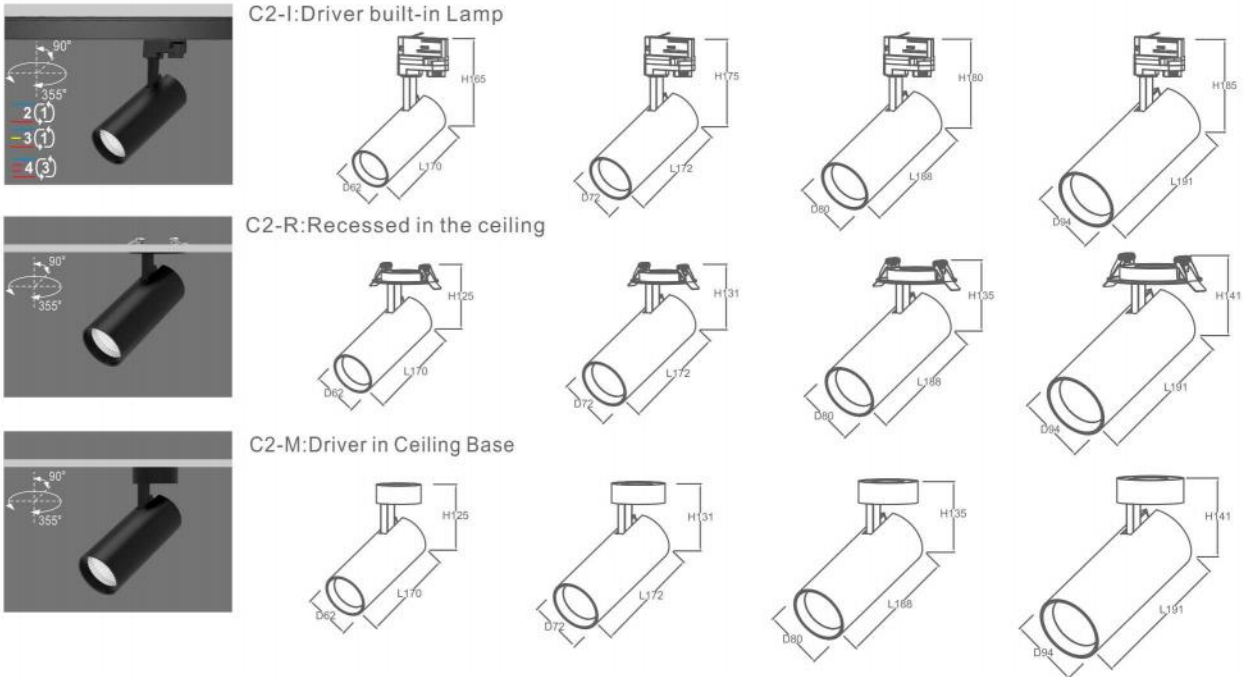

LED Chip: Citizen COB/ Bridgelux COB/Philips COB
Profiles | Aluminium
System Lumen: 90-100lm/W

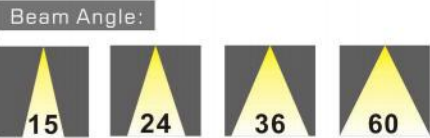

LED
BUILT IN

RoHS

IP20

CE

TRIAC
DIMMABLE

3
YEAR

5
YEAR

UGR
<19

50/60
Hz

Order Code	Watts	Beam Angle	CCT	CRI	Size	Cutout
HT62-C2- I	7/10/15W	15/24/36/60°	2700K-5000K	80/90/97	D62*L170*H165	
HT62-C2-R	7/10/15W	15/24/36/60°	2700K-5000K	80/90/97	D62*L170*H125	75
HT62-C2-M	7/10/15W	15/24/36/60°	2700K-5000K	80/90/97	D62*L170*H125	
HT72-C2- I	10/15/20W	15/24/36/60°	2700K-5000K	80/90/97	D72*L172*H175	
HT72-C2-R	10/15/20W	15/24/36/60°	2700K-5000K	80/90/97	D72*L172*H131	75
HT72-C2-M	10/15/20W	15/24/36/60°	2700K-5000K	80/90/97	D72*L172*H131	
HT80-C2- I	20/25/30W	15/24/36/60°	2700K-5000K	80/90/97	D80*L188*H180	
HT80-C2-R	20/25/30W	15/24/36/60°	2700K-5000K	80/90/97	D80*L188*H135	100
HT80-C2-M	20/25/30W	15/24/36/60°	2700K-5000K	80/90/97	D80*L188*H135	
HT94-C2- I	30/35/40W	15/24/36/60°	2700K-5000K	80/90/97	D94*L191*H185	
HT94-C2-R	30/35/40W	15/24/36/60°	2700K-5000K	80/90/97	D94*L191*H141	120
HT94-C2-M	30/35/40W	15/24/36/60°	2700K-5000K	80/90/97	D94*L191*H141	



■ Short Tube C3 Series

Popular design and looking in the market




C3

Track Light Range



LED Chip: Citizen COB/ Bridgelux COB/ Philips COB
 Profiles | Aluminium
 System Lumen: 90-100lm/W

Beam Angle:

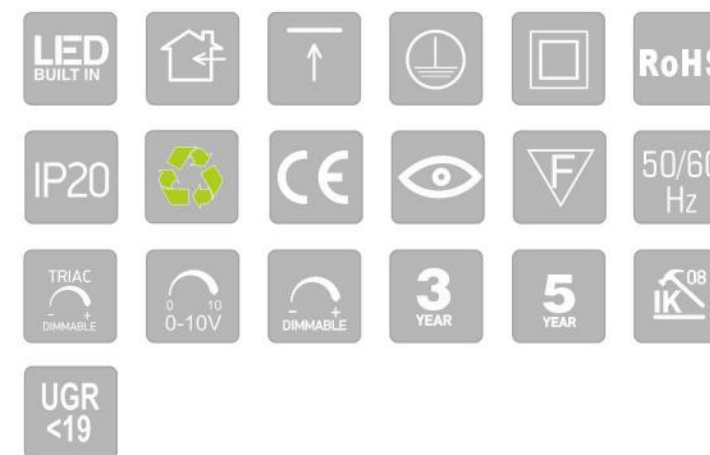

Order Code	Watts	Beam Angle	CCT	CRI	Size
HT10-C3-DL	20/25/30W	15/24/36/60°	2700K-5000K	80/90/97	D104*L62*H184
HT80-C3-DL	10/15/20W	15/24/36/60°	2700K-5000K	80/90/97	D80*L54*H160


■ High Power C4 Series

To cover more wattage project in the market





C4


Track Light Range

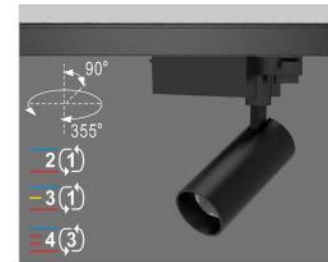

C4-B: Driver in Box

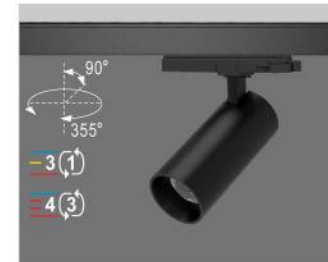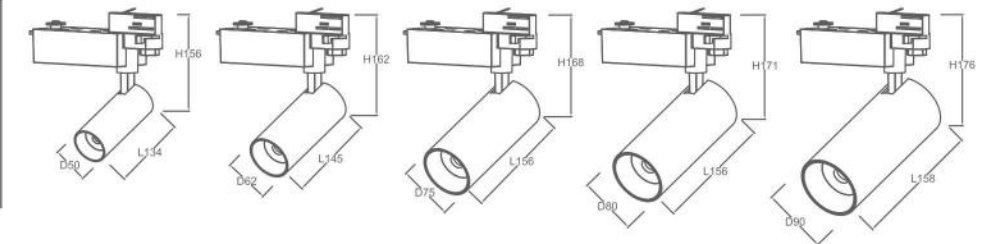

C4-D: Driver in Adapter

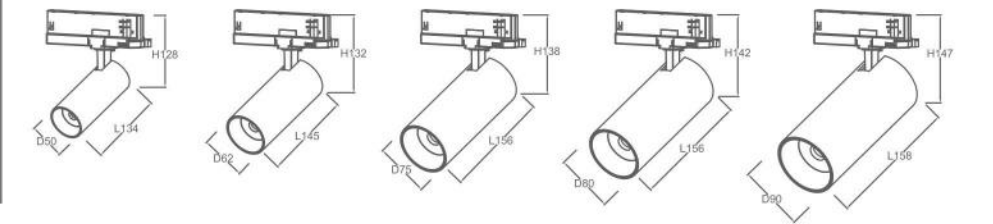


LED Chip: Citizen COB/ Bridgelux COB/ Philips COB

Profiles | Aluminium

System Lumen: 100-110lm/W

Beam Angle:

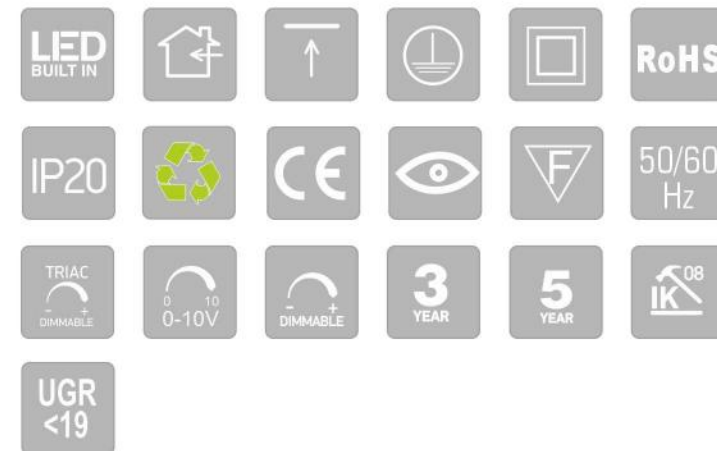



Order Code	Watts	Beam Angle	CCT	CRI	Size
HT50-C4-B	7/10/15W	15/24/36/60°	2700K-5000K	80/90/97	D50*L134*H156
HT50-C4-D	10/15W	15/24/36/60°	2700K-5000K	80/90/97	D50*L134*H128
HT62-C4-B	10/15/20W	15/24/36/60°	2700K-5000K	80/90/97	D62*L145*H162
HT62-C4-D	10/15/20W	15/24/36/60°	2700K-5000K	80/90/97	D62*L145*H132
HT75-C4-B	15/20/25W	15/24/36/60°	2700K-5000K	80/90/97	D75*L156*H168
HT75-C4-D	15/20/25W	15/24/36/60°	2700K-5000K	80/90/97	D75*L156*H138
HT80-C4-B	25/30/35W	15/24/36/60°	2700K-5000K	80/90/97	D80*L156*H171
HT80-C4-D	25/30/35W	15/24/36/60°	2700K-5000K	80/90/97	D80*L156*H142
HT90-C4-B	35/40/45W	15/24/36°	2700K-5000K	80/90/97	D90*L158*H176
HT90-C4-D	35/40/45W	15/24/36°	2700K-5000K	80/90/97	D90*L158*H147

■ Track light with long tube C5 Series
A dream artist in your space




AC 220V integrated hidden
embedded track head

C5
Track Light Range



LED Chip: Citizen COB/ Bridgelux COB/ Philips COB
Profiles | Aluminium
System Lumen: 80-100lm/W

Beam Angle:

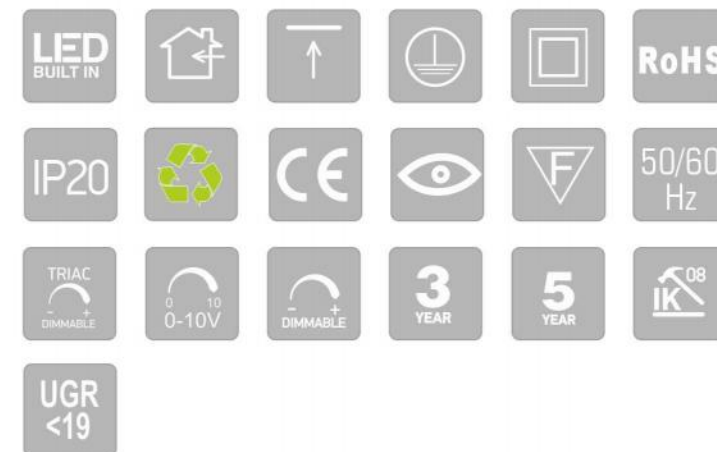

Order Code	Watts	Beam Angle	CCT	CRI	Size
HT35-C5-D	7/10/15W	15/24/36°	2700K-5000K	80/90/97	D35*L170*H218
HT35-C5-H	7/10/15W	15/24/36°	2700K-5000K	80/90/97	D35*L170*H205













Short Tube Track Light C6 Series

Popular higher power short tube type in the market



C6

Track Light Range



LED Chip: Citizen COB/ Bridgelux COB/ Philips COB

Profiles | Aluminium

System Lumen: 100-130lm/W

Beam Angle:



LED
BUILT IN

RoHS

IP20

CE

50/60
Hz

DIMMABLE

0-10V

DIMMABLE

3
YEAR

5
YEAR

IK08

UGR
<19




Order Code	Watts	Beam Angle	CCT	CRI	Size
HT80-C6-DL	10/15/20W	15/24/36/60°	2700K-5000K	80/90/97	D80*L80*H150
HT90-C6-DL	20/25/30W	15/24/36/60°	2700K-5000K	80/90/97	D90*L91*H160
HT10-C6-DL	25/30/35W	15/24/36/60°	2700K-5000K	80/90/97	D100*L100*H170
HT11-C6-DL	35/40/45W	15/24/36/60°	2700K-5000K	80/90/97	D110*L106*H180
HT80-C6-DR	10/15/20W	15/24/36/60°	2700K-5000K	80/90/97	D80*L80*H150
HT90-C6-DR	20/25/30W	15/24/36/60°	2700K-5000K	80/90/97	D90*L91*H160
HT10-C6-DR	25/30/35W	15/24/36/60°	2700K-5000K	80/90/97	D100*L100*H170
HT11-C6-DR	35/40/45W	15/24/36/60°	2700K-5000K	80/90/97	D110*L106*H180
HT80-C6-DA	10/15/20W	15/24/36/60°	2700K-5000K	80/90/97	D80*L80*H150
HT90-C6-DA	20/25/30W	15/24/36/60°	2700K-5000K	80/90/97	D90*L91*H160
HT10-C6-DA	25/30/35W	15/24/36/60°	2700K-5000K	80/90/97	D100*L100*H170
HT11-C6-DA	35/40/45W	15/24/36/60°	2700K-5000K	80/90/97	D110*L106*H180

■ ECO Version C8 Series
Competitive solution to win more projects




C8
Track Light Range

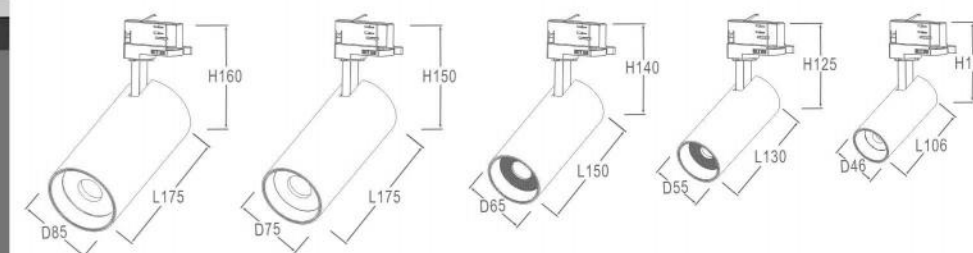

LED Chip: TYF COB/ Bridgelux COB
Profiles | Aluminium
System Lumen: 90-100lm/W

Beam Angle:

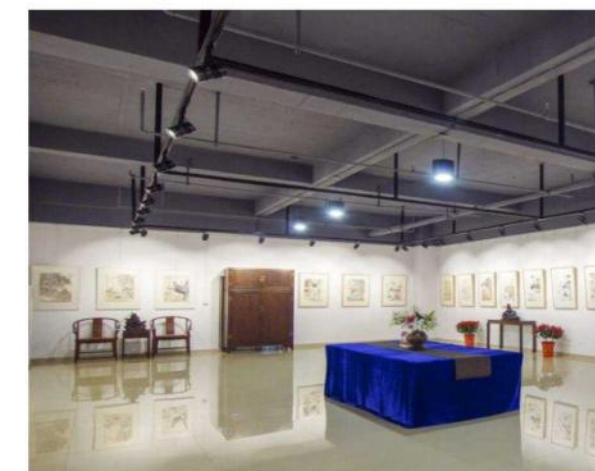

Order Code	Watts	Beam Angle	CCT	CRI	Size
HT46-C8-IL	7/10W	15/24/36/60°	2700K-5000K	80/90/97	D46*L106*H116
HT55-C8-IL	10/15W	15/24/36/60°	2700K-5000K	80/90/97	D55*L130*H125
HT65-C8-IL	15/20W	15/24/36/60°	2700K-5000K	80/90/97	D65*L150*H140
HT75-C8-IL	20/30W	15/24/36/60°	2700K-5000K	80/90/97	D75*L175*H150
HT85-C8-IL	30/40W	15/24/36/60°	2700K-5000K	80/90/97	D85*L175*H160

■ ECO Version C9 Series
Competitive and high efficiency lumen output







C9





Track Light Range



C9-D: Driver in Adapter



C9-I: Driver built-in lamp





LED Chip: TYF COB/ Bridgelux COB

Profiles | Aluminium

System Lumen: 90-110lm/W

Beam Angle:

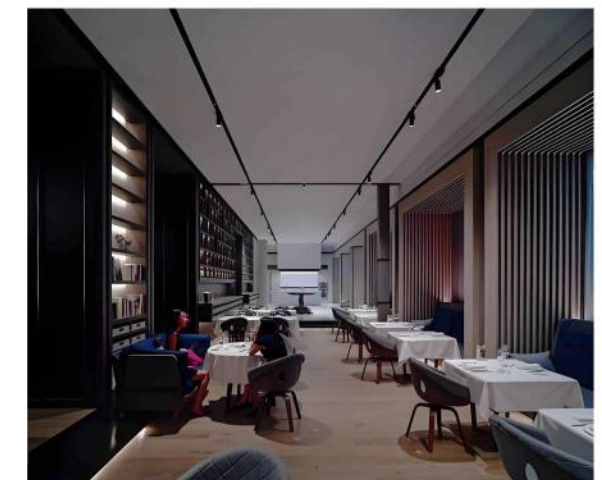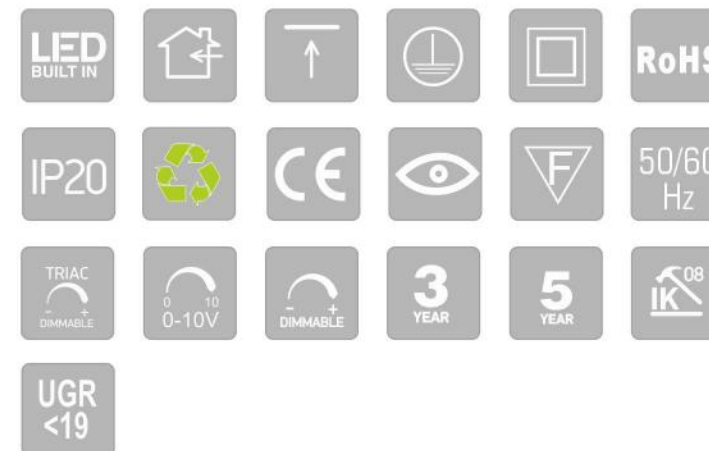


Order Code	Watts	Beam Angle	CCT	CRI	Size
HT50-C9-D	5/7W	15/24/36°	2700K-5000K	80/90/97	D50*L120*H128
HT60-C9-D	10/15W	15/24/36°	2700K-5000K	80/90/97	D60*L120*H132
HT66-C9-D	15/20W	15/24/36°	2700K-5000K	80/90/97	D66*L130*H138
HT79-D9-D	20/25/30W	15/24/36°	2700K-5000K	80/90/97	D79*L160*H142
HT50-C9-I	5/7W	15/24/36°	2700K-5000K	80/90/97	D50*L120*H151
HT60-C9-I	10/15W	15/24/36°	2700K-5000K	80/90/97	D60*L120*H165
HT66-C9-I	15/20W	15/24/36°	2700K-5000K	80/90/97	D66*L130*H175
HT79-C9-I	20/25/30W	15/24/36°	2700K-5000K	80/90/97	D79*L160*H182




Grille Half G1 Series



Difference always comes from weeny details

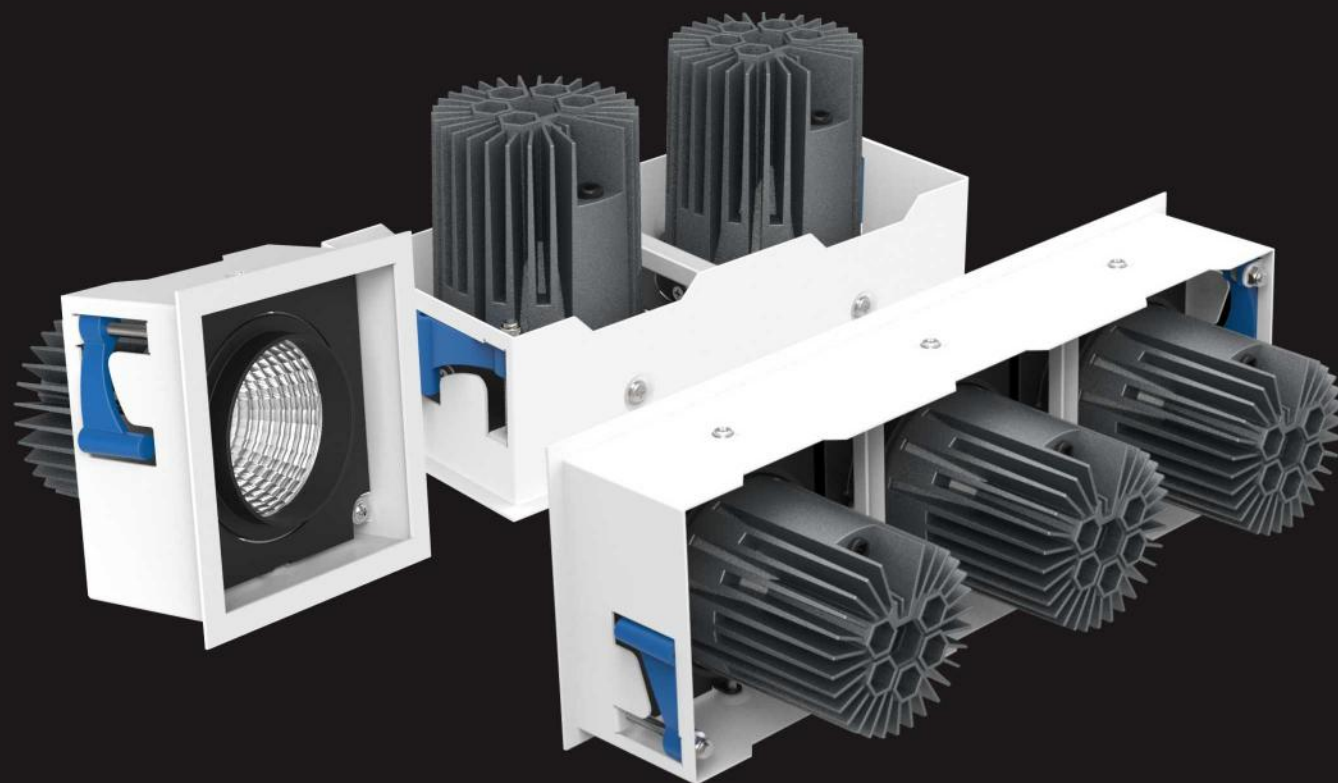



G1 Grille Light Range







G1-S



G1-D



G1-T

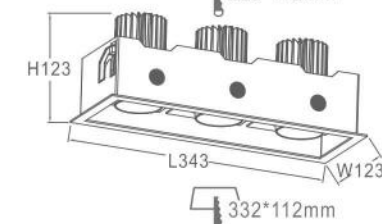

LED Chip: Citizen COB/ Bridgelux COB/ Philips COB

Die cast | Aluminium

System Lumen: 85-100lm/W

Beam Angle:



Order Code	Watts	Beam Angle	CCT	CRI	Size	Cutout
HG03-G1-S	7/10W	15/24/36/60°	2700K-5000K	80/90/97	L93*W93*H92	82*82
HG03-G1-D	14/20W	15/24/36/60°	2700K-5000K	80/90/97	L173*W93*H92	162*82
HG03-G1-T	21/30W	15/24/36/60°	2700K-5000K	80/90/97	L253*W93*H92	242*82
HG04-G1-S	15/20/25/30W	15/24/36/60°	2700K-5000K	80/90/97	L123*W123H123	112*112
HG04-G1-D	30/40/50/60W	15/24/36/60°	2700K-5000K	80/90/97	L233*W123H123	222*112
HG04-G1-T	45/60/75/90W	15/24/36/60°	2700K-5000K	80/90/97	L343*W123H123	332*112




Trunk Light T1 Series

For large area wash lighting




T1

Trunk Light Range

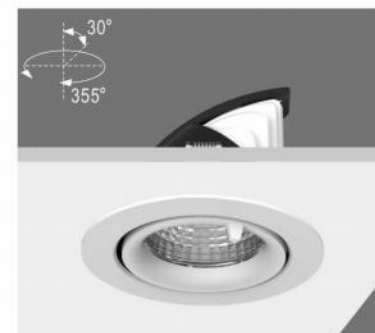

T1-S

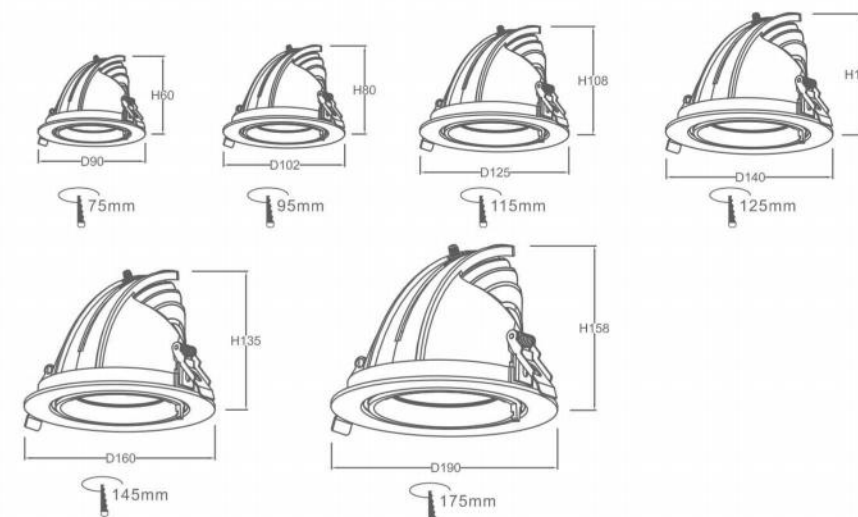

LED Chip: Citizen COB/ Bridgelux COB/ Philips COB

Die cast | Aluminium

System Lumen: 90-100lm/W

Beam Angle:



Order Code	Watts	Beam Angle	CCT	CRI	Size	Cutout
HE03-T1-S	7/10W	15/24/38/60°	2700K-5000K	80/90/97	D90*H60	75
HE35-T1-S	10/15W	15/24/38°	2700K-5000K	80/90/97	D102*H80	95
HE04-T1-S	15/20/25W	15/24/38/60°	2700K-5000K	80/90/97	D125*H108	110
HE05-T1-S	25/30/35W	15/24/38/60°	2700K-5000K	80/90/97	D140*H115	125
HE06-T1-S	35/40/45W	15/24/38/60°	2700K-5000K	80/90/97	D160*H135	145
HE08-T1-S	40/50/60W	15/24/38/60°	2700K-5000K	80/90/97	D190*H158	175