



Hives Lighting Limited

Add: Xueziwei Industrial Park, Shajing, Bao'an District, Shenzhen, China

Tel: 0755-27350487

Email: sales@hives-lighting.com

Web: www.hives-lighting.com



Web



Wechat

Catalogue 2025
HIVES LIGHTING





M8

Ceiling light



IP54

LED Chip: Epistar/San'anSMD
Lm/w:90-120lm/w

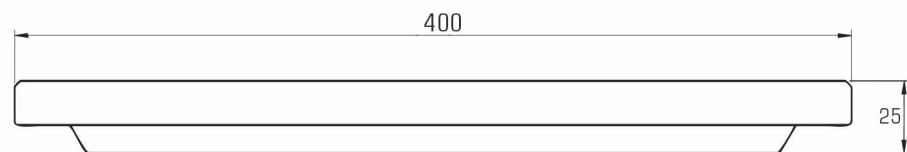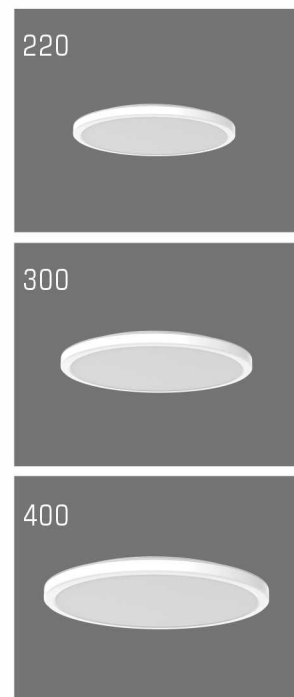

Order Code	Watts	Beam Angle	CCT	CRI	Size(mm)
HC220-M8-D	15W	120°	3000K-4000K-6000K	80/90/97	D220*H25
HC300-M8-D	24W	120°	3000K-4000K-6000K	80/90/97	D300*H25
HC400-M8-D	30W	120°	3000K-4000K-6000K	80/90/97	D400*H25





M9

Ceiling light



IP54

LED Chip: Epistar/San'anSMD
Lm/w:90-120lm/w

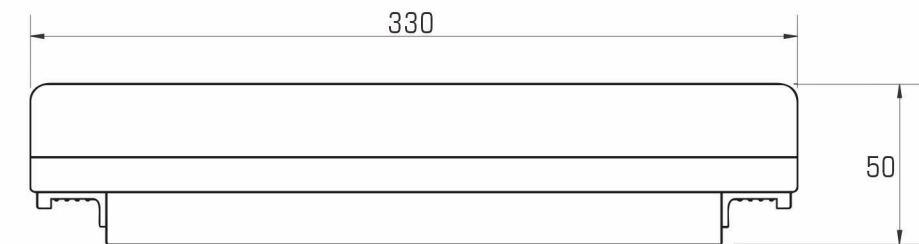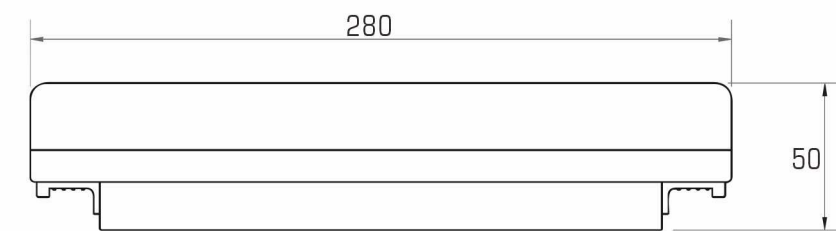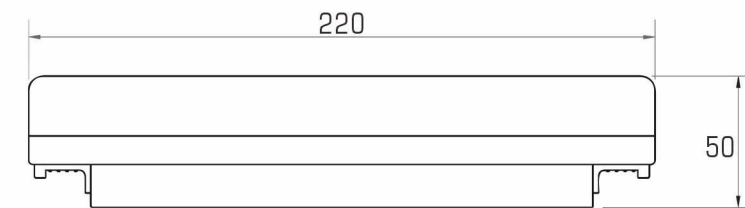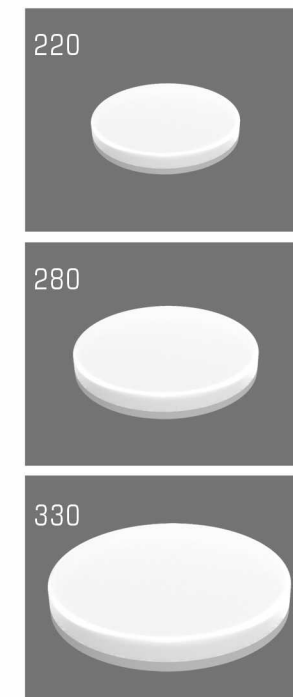

Order Code	Watts	Beam Angle	CCT	CRI	Size(mm)
HC220-M9-D	15W	120°	3000K-4000K-6000K	80/90/97	D220*H50
HC280-M9-D	24W	120°	3000K-4000K-6000K	80/90/97	D280*H50
HC330-M9-D	30W	120°	3000K-4000K-6000K	80/90/97	D280*H50



M9

Ceiling light



LED Chip: Epistar /San'anSMD
Lm/w:90-120lm/w

IP54

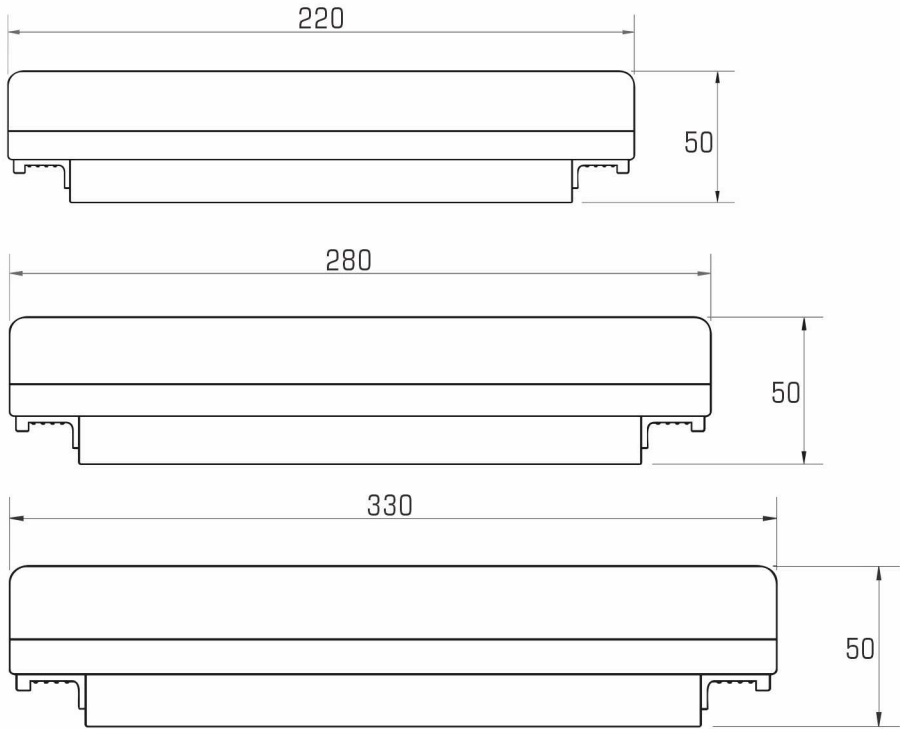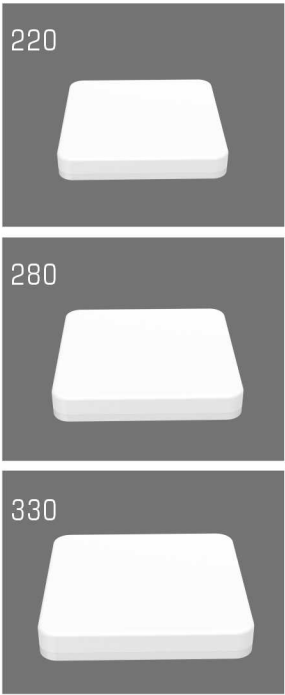


Order Code	Watts	Beam Angle	CCT	CRI	Size(mm)
HC220-M10-B	15W	120°	3000K-4000K-6000K	80/90/97	L220*W220*H50
HC280-M10-B	24W	120°	3000K-4000K-6000K	80/90/97	L280*W280*H50
HC330-M10-B	30W	120°	3000K-4000K-6000K	80/90/97	L330*W330*H50

P10


Panel light

Back-lit Panel
Edge-lit Panel

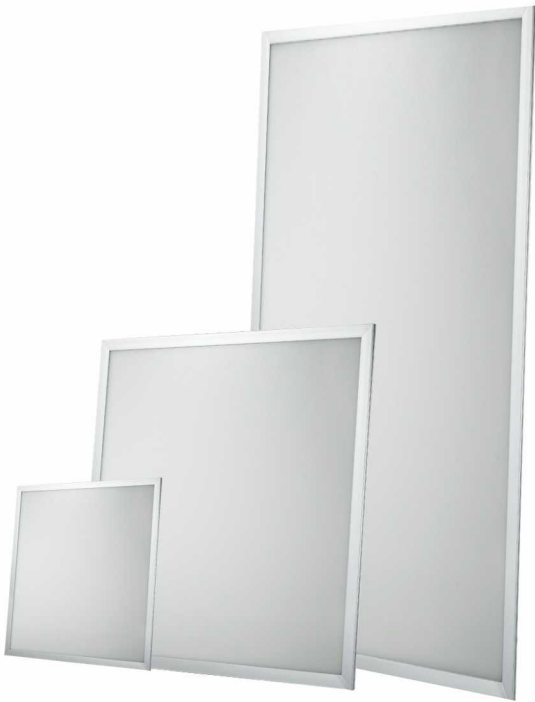

LED Chip::Epistar /San'anSMD
Lm/w:90-120lm/w

IP20

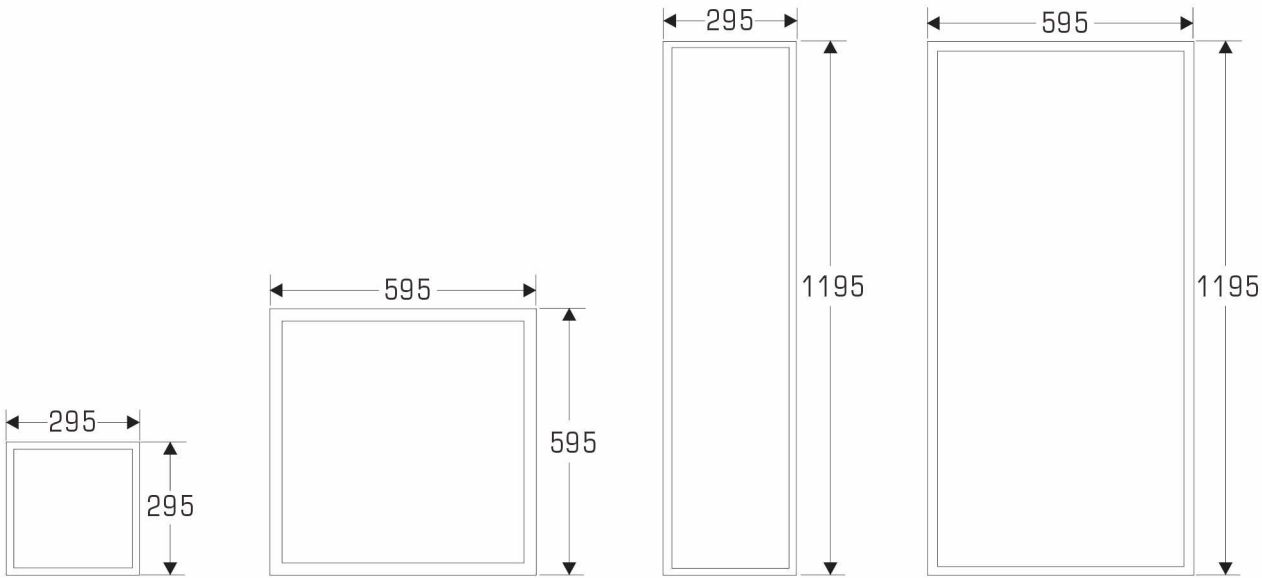

Order Code	Watts	Beam Angle	CCT	CRI	Size (mm)
HD295-P10-S	8-15W	120°	3000K-4000K-6000K	80/90/97	L295*W295*H9/H35mm
HD595-P10-S	20-40W	120°	3000K-4000K-6000K	80/90/97	L595*W595*H9/H35mm
HD295-P10-R	20-40W	120°	3000K-4000K-6000K	80/90/97	L295*W1195*H9/H35mm
HP595-P10-R	40-70W	120°	3000K-4000K-6000K	80/90/97	L595*W1195*H12/H35mm


S5

Linear light



IP20

LED Chip: Epistar/San'anSMD
Lm/w:90-140lm/w

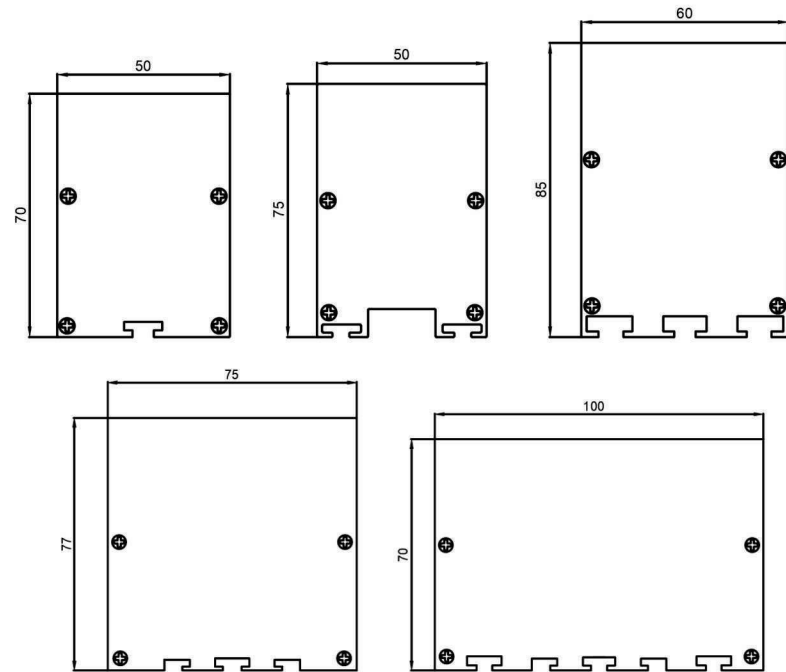

Order Code	Watts	Beam Angle	CCT	CRI	Size(mm)
HL-S5-L06	20W	120°	3000K-6000K	80/90/97	L=600mm
HL-S5-L12	40W	120°	3000K-6000K	80/90/97	L=1200mm
HL-S5-L15	50W	120°	3000K-6000K	80/90/97	L=1500mm
HL-S5-L18	55W	120°	3000K-6000K	80/90/97	L=1800mm
HL-S5-L20	60W	120°	3000K-6000K	80/90/97	L=2000mm
HL-S5-L25	70W	120°	3000K-6000K	80/90/97	L=2500mm
HL-S5-L27	80W	120°	3000K-6000K	80/90/97	L=2700mm

S6

Linear light




HIVES LIGHTING



IP20

LED Chip: Epistar/San'anSMD
Lm/w:90-160lm/w

Work with track rail:
1 Phase: two wires 2 1
2 Phase: three wires 3 1
3 phase: four wires 4 3

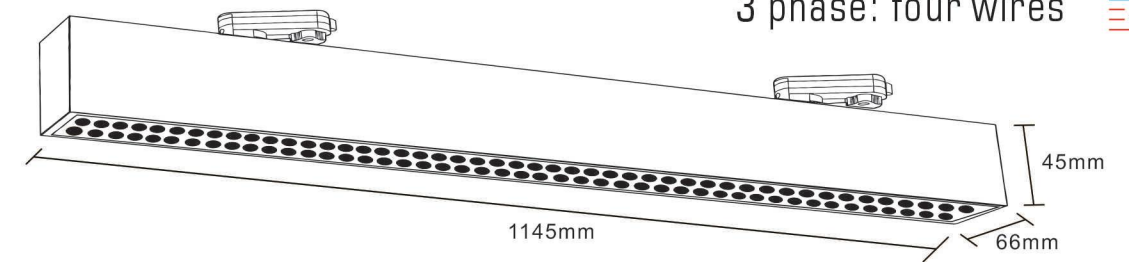

Surface mounted



With Track Rail




Pendant



Order Code	Watts	Beam Angle	CCT	CRI	Size(mm)
HL-S6-L12	30-42W	72°	2700-6000K	80/90/97	W66*H45*L1145

S3

Linear light









Press and hold to open
No screws on lamp



IP20


LED Chip: Epistar/San'anSMD
Lm/w:90-140lm/w



Order Code	Watts	Beam Angle	CCT	CRI	Size(mm)
HL06-S3-L	20W	120°	2700K-6500K	80/90/97	L600*W67*H69mm
HL12-S3-L	40W	120°	2700K-6500K	80/90/97	L1200*W67*H69mm
HL15-S3-L	50W	120°	2700K-6500K	80/90/97	L1500*W67*H69mm






S4

Linear light



IP20

LED Chip: Epistar/San'anSMD
Lm/w:90-140lm/w

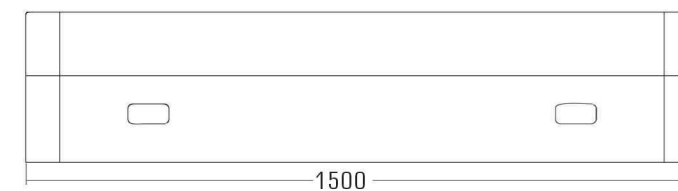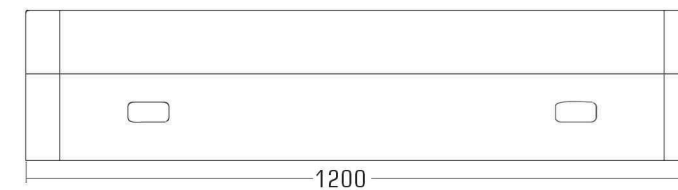


Order Code	Watts	Beam Angle	CCT	CRI	Size(mm)
HL06-S4-L	20W	120°	2700K-6500K	80/90/97	L600*W73*H70mm
HL06-S4-L	40W	120°	2700K-6500K	80/90/97	L1200*W73*H70mm
HL06-S4-L	50W	120°	2700K-6500K	80/90/97	L1500*W73*H70mm



Track linear light B1 Series

Track light and Linear light can use the same track

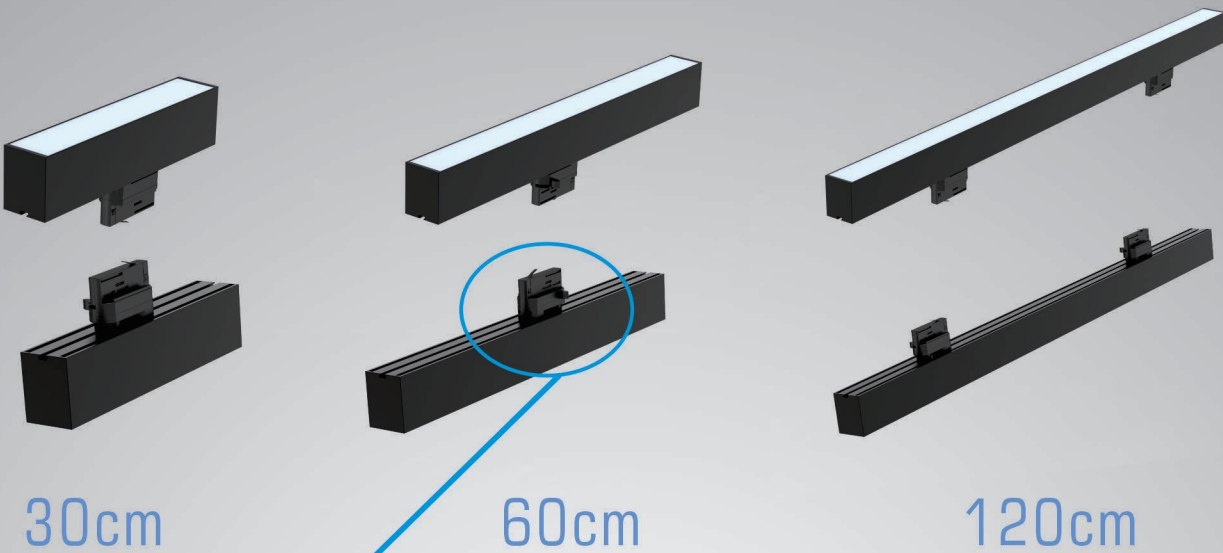


30cm

60cm

120cm









Change Adaptor can do
CCT changeable and wattage changeable

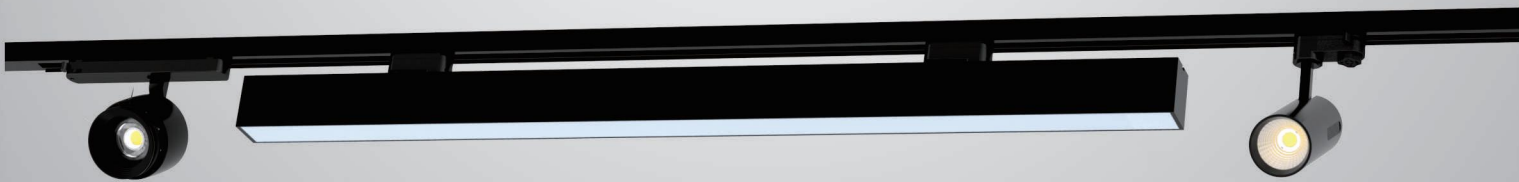


S7

Track Linear Light Range

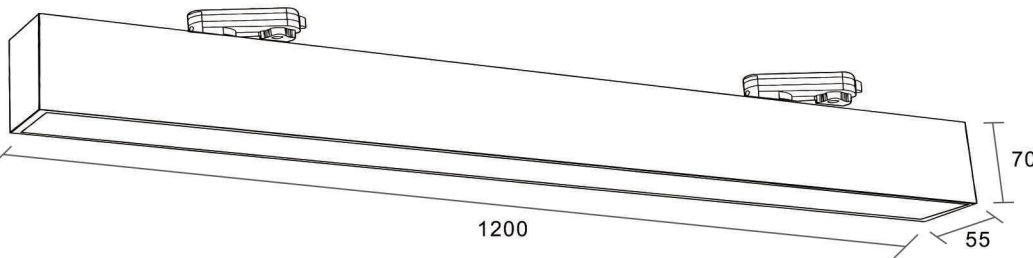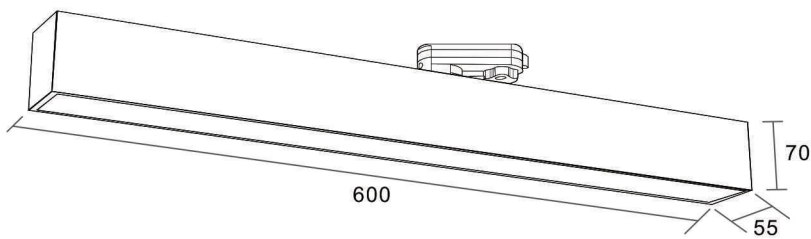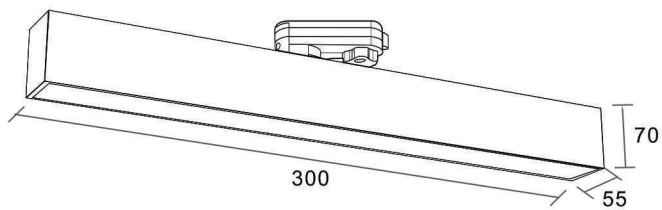

LED Chip: Samsung/San'an
Profiles | Aluminium
System Lumen: 100-110lm/W

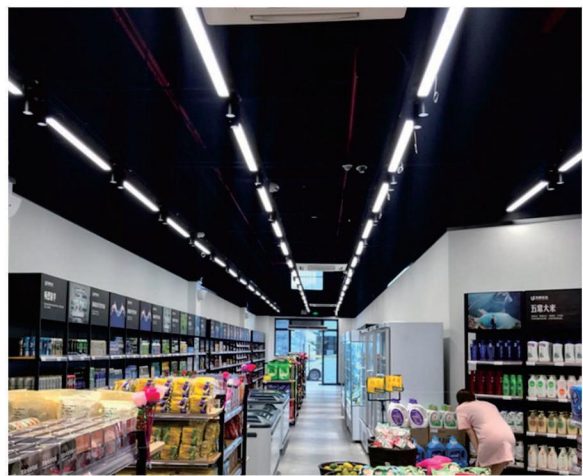


Order Code	Watts	Beam Angle	CCT	CRI	Size
HL-S7-L03	7/10/15W	120°	2700K-5000K	80/90/97	W55*H70*L300
HL-S7-L06	10/15/20W	120°	2700K-5000K	80/90/97	W55*H70*L600
HL-S7-L12	20/25/30W	120°	2700K-5000K	80/90/97	W55*H70*L1200

U2


LED Underground light-SMD



IP67



Honeycomb

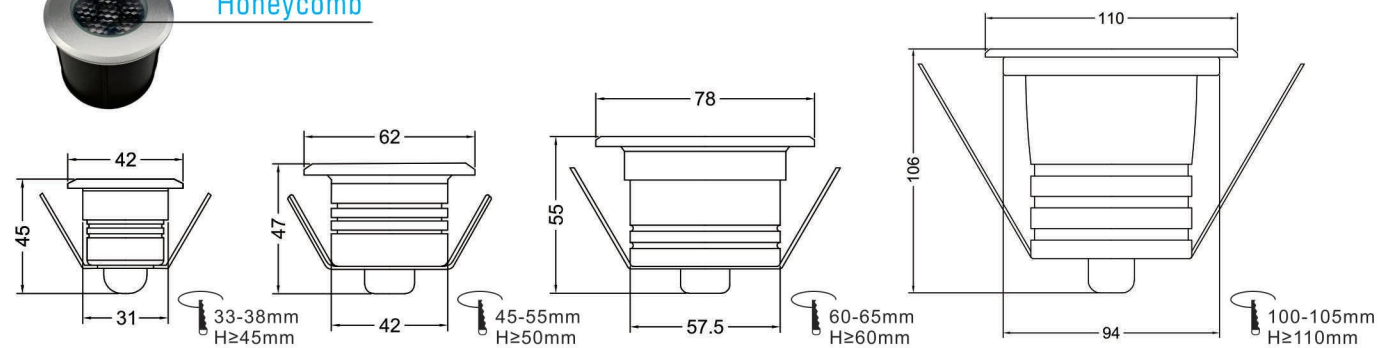

LED Chip: Osram
 Colour Temp: 2700K/3000K/4000K/6000K/Red/Green/Bule/Yellow
 Material: B142/B162/B178: 6063 Aluminium + ABS Embedded part
 Material: B1110: 304 Stainless steel ring + 6063 Aluminium housing + ABS Embedded part
 DC12V/DC24V / AC230V Input



Order Code	Input	Watts	Beam Angle	CRI	Size(mm)	Cut(mm)
HU42-U2-D	DC12/DC24V	1W	15/30/60/120°	80/90/97	D42*H45	33-38
HU62-U2-D	DC12/DC12V/AC230V	3W	15/30/60/120°	80/90/97	D62*H47	45-55
HU78-U2-D	DC12/DC12V/AC230V	6W	15/30/60/120°	80/90/97	D78*H55	60-65
HU11-U2-D	DC12/DC12V/AC230V	9W	15/30/60/120°	80/90/97	D110*H106	100-105




U3

LED Underground light-SMD



Honeycomb

IP67

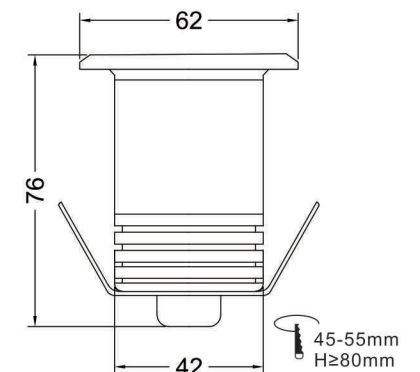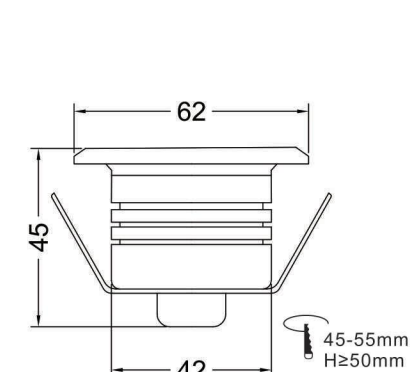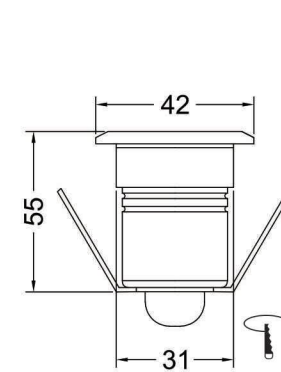

LED Chip: Osram
 Colour Temp: 2700K/3000K/4000K/6000K/Red/Green/Bule/Yellow
 Material: B142/B162/B178: 6063 Aluminium + ABS Embedded part
 DC12V/DC24V / AC230V Input



Order Code	Input	Watts	Beam Angle	CRI	Size(mm)	Cut(mm)
HU42-U3-D	DC12/DC24V	3W	8/15/30/45/60°	80/90/97	D42*H55	33-38
HU62-U3-D	DC12/DC12V/AC230V	3W	8/15/30/45/60°	80/90/97	D62*H45	45-55
HU62-U3-DH	DC12/DC12V/AC230V	5W	8/15/30/45/60°	80/90/97	D62*H76	45-55


U4

LED Underground light-COB



Honeycomb

IP67

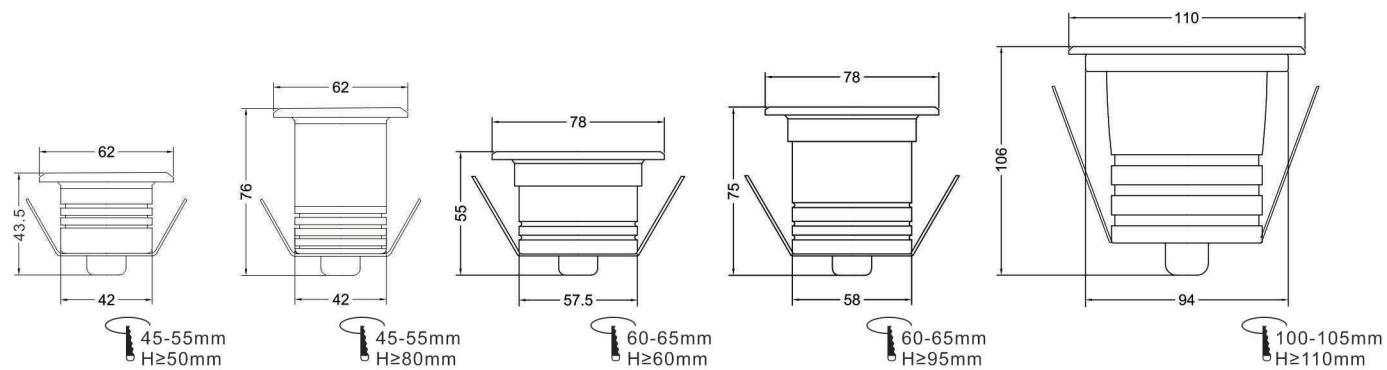

LED Chip: Osram
 Colour Temp: 2700K/3000K/4000K/6000K/Red/Green/Bule/Yellow
 Material: B162/B178: 6063 Aluminium + ABS Embedded part
 Material: B110: 304 Stainless steel ring + 6063 Aluminium housing + ABS Embedded part
 DC12V/DC24V / AC230V Input



Order Code	Input	Watts	Beam Angle	CRI	Size(mm)	Cut(mm)
HU62-U4-R	DC12/DC24V/AC230V	3W	15/24/36°	80/90/97	D62*H43.5	45-55
HU62-U4-RH	DC12/DC24V/AC230V	5W	15/24/36°	80/90/97	D62*H76	45-55
HU78-U4-R	DC12/DC24V/AC230V	5W	15/24/36°	80/90/97	D78*H55	60-65
HU78-U4-R H	DC12/DC24V/AC230V	7/9W	15/24/36°	80/90/97	D78*H75	60-65
HU11-U4-R	DC12/DC24V/AC230V	12W	15/24/36°	80/90/97	D110*H106	100-105

U5

LED Underground light




HIVES LIGHTING



LED Chip: Osram
 Colour Temp: 2700K/3000K/4000K/6000K/Red/Green/Bule/Yellow
 Material: B115/B120/B125: 304 Stainless steel + ABS Embedded part
 Material: B132: 304 Stainless steel ring + 6063 Aluminium housing + ABS Embedded part
 DC12V/DC24V Input

IP67

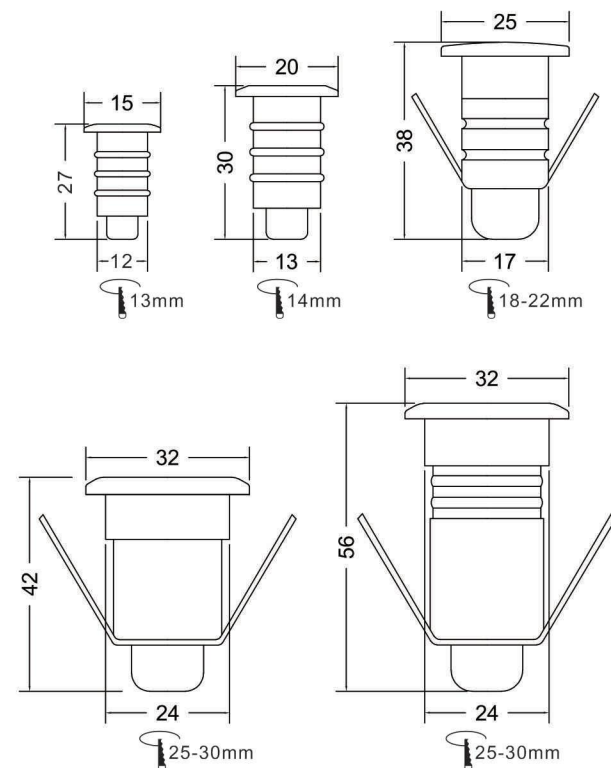

Order Code	Input	Watts	Beam Angle	CRI	Size(mm)	Cut(mm)
HU15-U5-D	DC12/DC24V	0.2W	120°	80/90/97	D15*H27	13
HU20-U5-D	DC12/DC24V	0.2W	120°	80/90/97	D20*H30	13
HU25-U5-D	DC12/DC24V	0.5W	24/120 °	80/90/97	D25*H38	18-22
HU32-U5-D	DC12/DC24V	1W	15/30/60/120°	80/90/97	D32*H42	25-30
HU32-U5-DH	DC12/DC24V	2W	15/30/60/120°	80/90/97	D32*H56	25-30


U6 LED Underwater light



One side




Two sides



Four sides



IP68

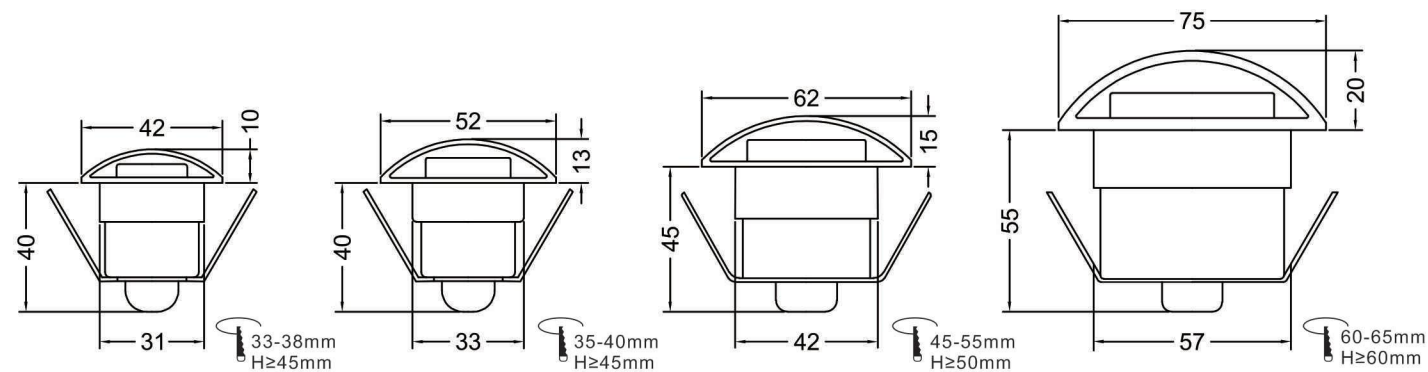


Led Chip: Osram
Colour Temp: 2700K/3000K/4000K/6000K/Red/Green/Bule/Yellow
Material: 304 Stainless steel + ABS Embedded part
DC24V



Order Code	Input	Watts	Beam Angle	CRI	Size(mm)	Cut(mm)
HU42-U6-D	DC12/DC24V	1W	1/2/4 Side(s)	80/90/97	D42*H50	33-38
HU52-U6-D	DC12/DC24V	1W	1/2/4 Side(s)	80/90/97	D52*H53	35-40
HU62-U6-D	DC12/DC24V	3W	1/2/4 Side(s)	80/90/97	D62*H60	45-55
HU75-U6-D	DC12/DC24V	4W	1/2/4 Side(s)	80/90/97	D75*H75	60-65


U7 LED Underwater light

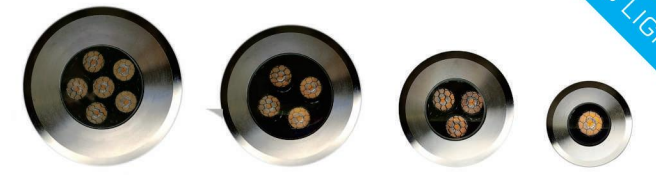


HIVES LIGHTING



IP68

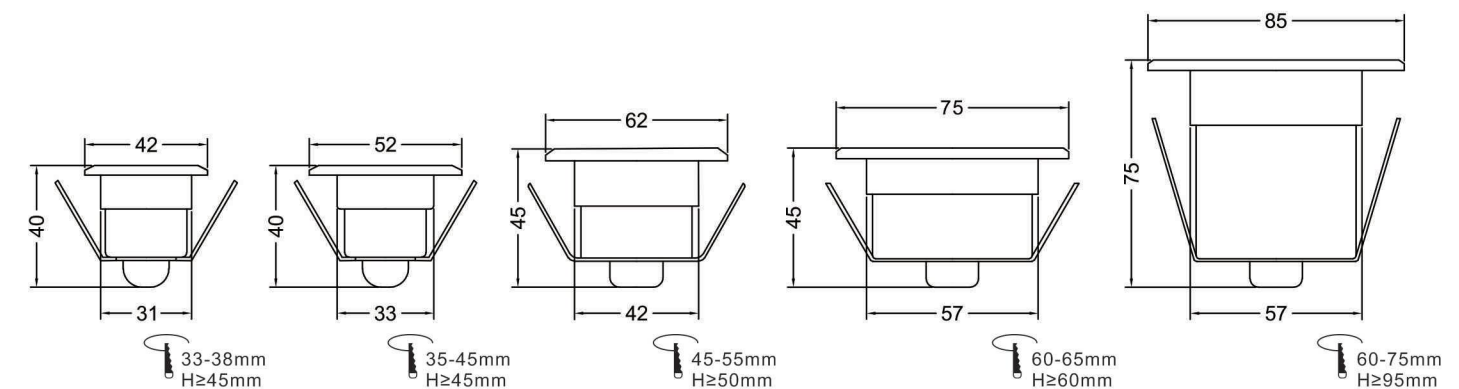

Led Chip: Osram
Colour Temp: 2700K/3000K/4000K/6000K/Red/Green/Bule/Yellow
Material: 304 Stainless steel + ABS Embedded part
DC24V

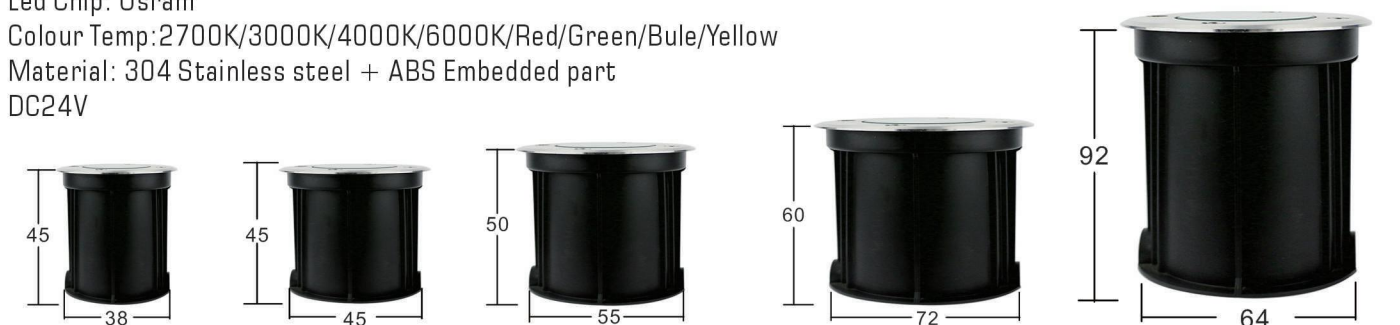


Order Code	Input	Watts	Beam Angle	CRI	Size(mm)	Cut(mm)
HU15-U7-D	DC12/DC24V	1W	15/30/60/120°	80/90/97	D42*H40	33-38
HU52-U7-D	DC12/DC24V	1W	15/30/60/120°	80/90/97	D52*H40	35-45
HU62-U7-D	DC12/DC24V	3W	15/30/60/120°	80/90/97	D62*H45	45-55
HU75-U7-D	DC12/DC24V	4W	15/30/60/120°	80/90/97	D75*H45	60-65
HU85-U7-D	DC12/DC24V	6W	15/30/60/120°	80/90/97	D85*H75	60-75

W5

LED Spot light-Outdoor



IP65

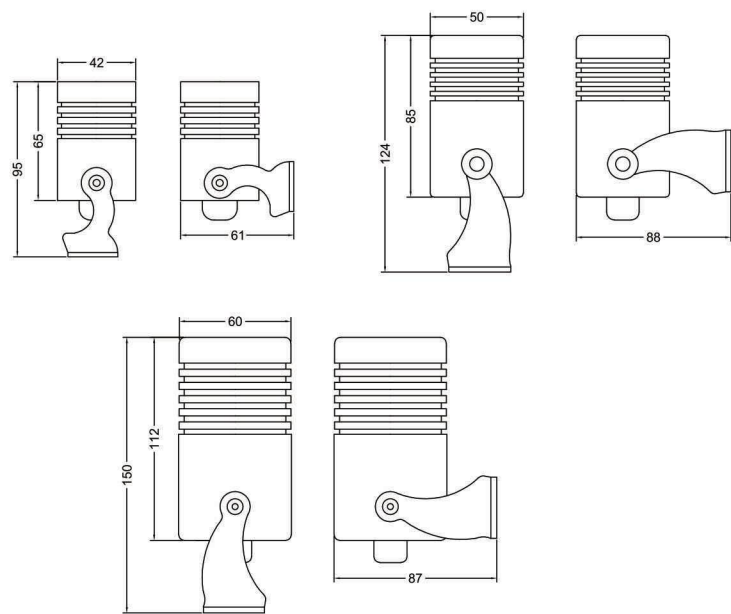

LED Chip: Bridgelux/Philips
Colour Temp:2700K/3000K/4000K/6000K/Red/Green/Bule/Yellow
Material: 6063 Aluminium housing
DC12V/DC24V / AC230V Input


Order Code	Input	Watts	Beam Angle	CRI	Size(mm)
HS42-W5-R	DC12/DC24V	3W	3/15/24/36°	80/90/97	D42*H65
HS50-W5-R	DC12/DC24V	5W	3/15/24/36°	80/90/97	D50*H85
HS60-W5-R	DC12/DC24V/AC230V	10W	3/15/24/36°	80/90/97	D60*H112

W6

LED Spot light-Outdoor



IP65

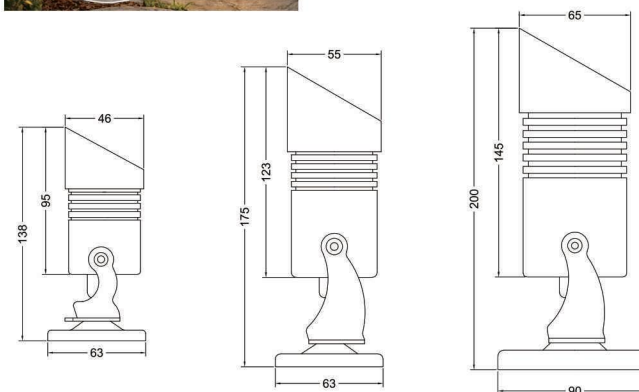


LED Chip: Bridgelux/Philips
Colour Temp:2700K/3000K/4000K/6000K/Red/Green/Bule/Yellow
Material: 6063 Aluminium housing
DC12V/DC24V / AC230V Input

Order Code	Input	Watts	Beam Angle	CRI	Size(mm)
HS46-W6-R	DC12/DC24V	3/5W	15/24/36°	80/90/97	D46*H95
HS55-W6-R	DC12/DC24V/AC230V	5/7W	15/24/36°	80/90/97	D55*H123
HS65-W6-R	DC12/DC24V/AC230V	10/12W	15/24/36°	80/90/97	D65*H145


W7

LED Wall light

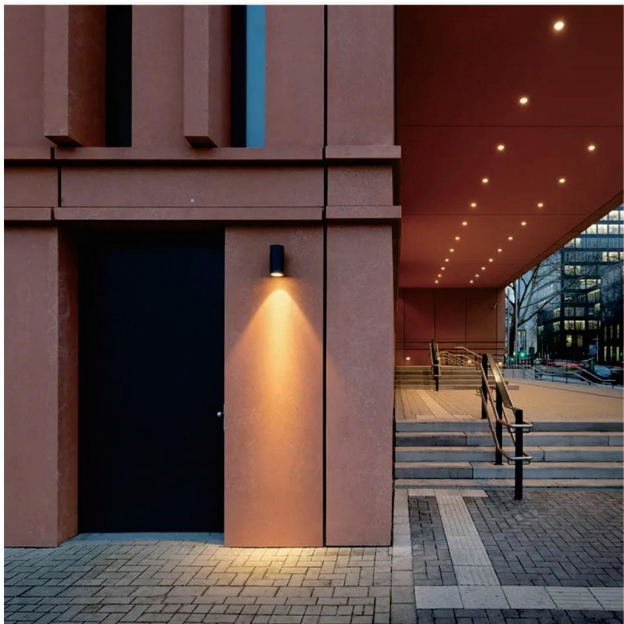

LED Chip: Osram/Bridgelux COB
 Lm/w: 85-100lm/w
 Material: Die-casting aluminium + Glass


IP65

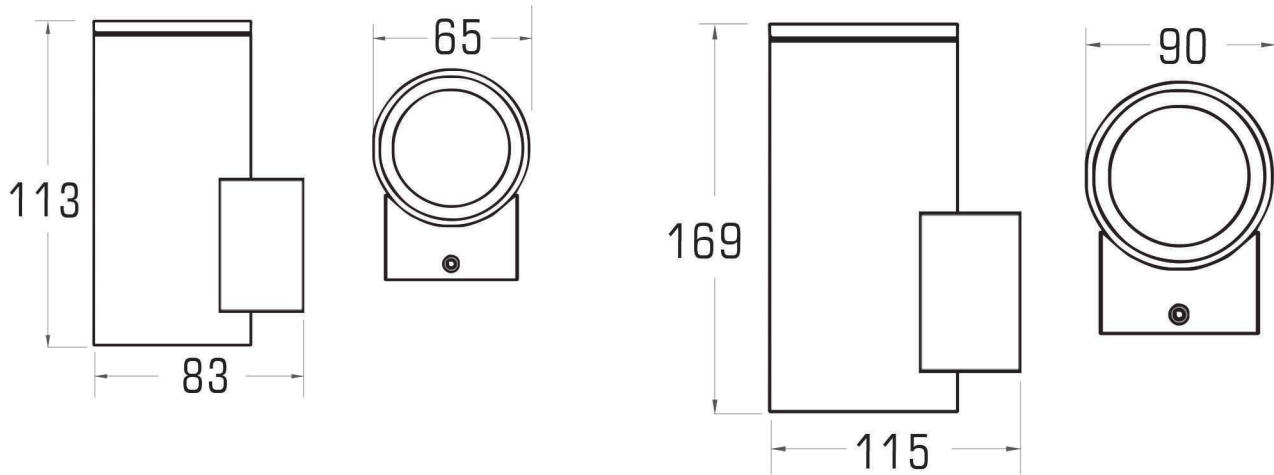

Order Code	Watts	Beam Angle	CCT	CRI	Size(mm)
HW65-W7-R	7/10/12W	40°	2700K-6000K	80/90/97	D65*H113*L83
HW90-W7-R	12/15/20W	40°	2700K-6000K	80/90/97	D90*H169*L115


W8

LED Wall light

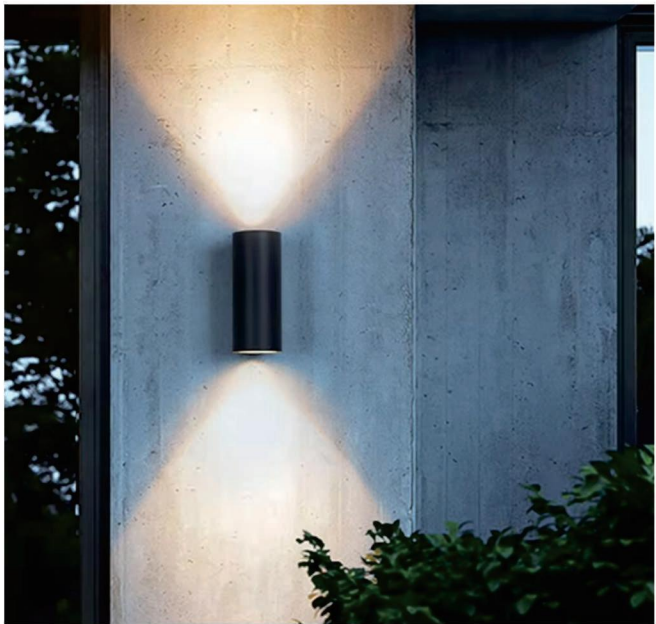

LED Chip: Osram/Bridgelux COB
 Lm/w: 85-100lm/w
 Material: Die-casting aluminium + Glass

IP65

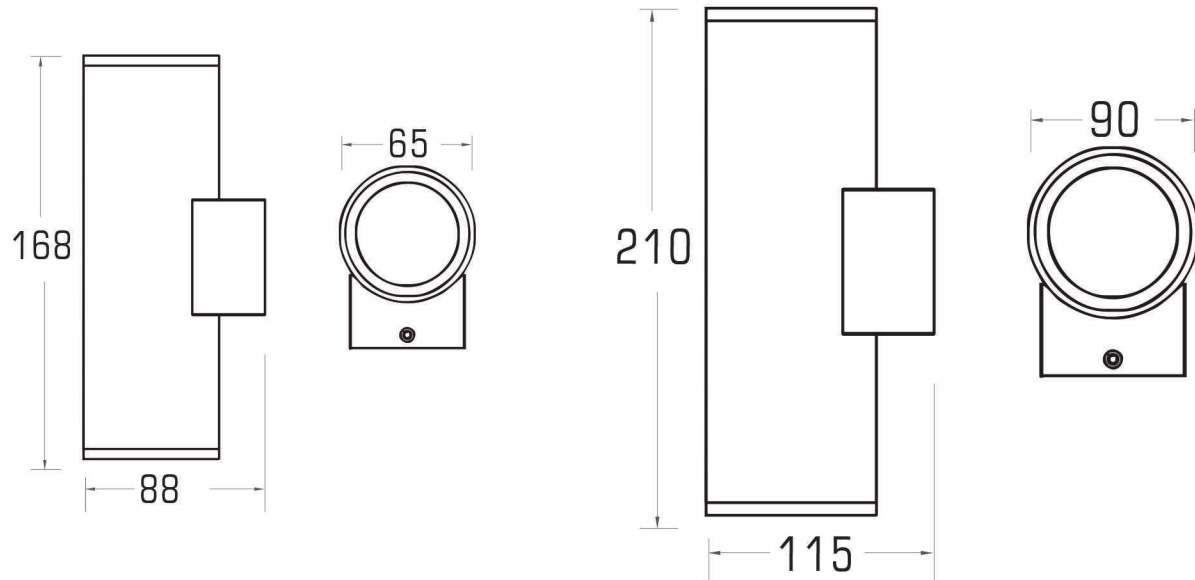

Order Code	Watts	Beam Angle	CCT	CRI	Size(mm)
HW65-W8-R	2x(7/10/12)W	40°	2700K-6000K	80/90/97	D65*H168*L88
HW90-W8-R	2x(12/15/20)W	40°	2700K-6000K	80/90/97	D90*H210*L115

W9

LED Security Spot light




S1-D Series



S1-R Series

LED Chip:Epistar/San'an SMD
Lm/w:85-100lm/w
Material: PC +ABS

IP65

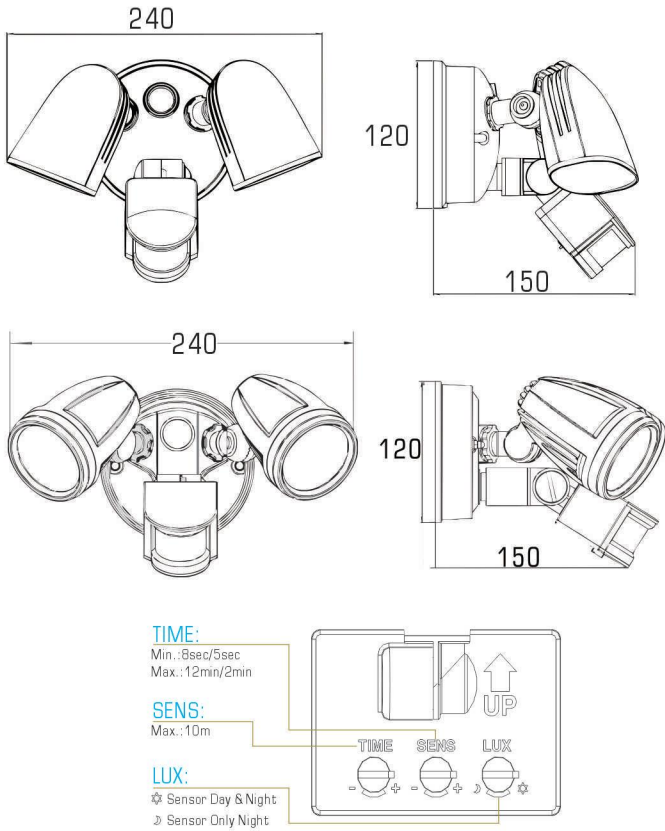

Order Code	Watts	Beam Angle	CCT	CRI	Size(mm)
HS24-W9-D	2*10W	120°	2700K-6000K	80/90/97	L240*W120*H150
HS24-W9-R	2*10W	120°	2700K-6000K	80/90/97	L240*W120*H150

W10

LED Security Spot light




S2-D Series



S2-R Series

LED Chip:Epistar/San'an SMD
Lm/w:85-100lm/w
Material: PC +ABS

IP65

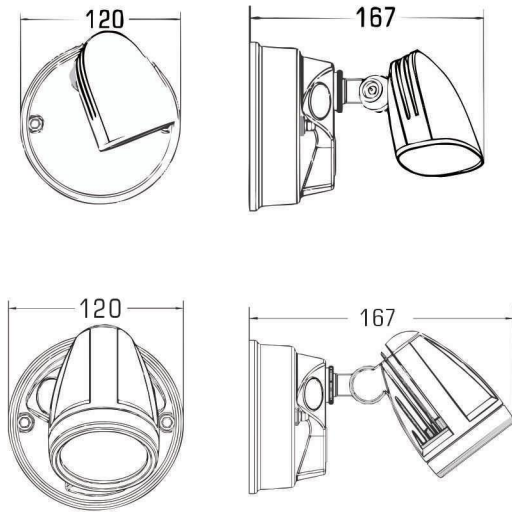

Order Code	Watts	Beam Angle	CCT	CRI	Size(mm)
HS12-W10-D	10W	120°	2700K-6000K	80/90/97	L120*H167
HS12-W10-R	10W	120°	2700K-6000K	80/90/97	L120*H167

B1

LED Bulkhead light





B1-D Series



B1-DF Series

LED Chip:Epistar/San'an SMD
Lm/w:85-100lm/w
Material: PC +ABS

IP65

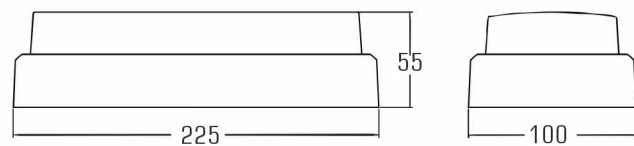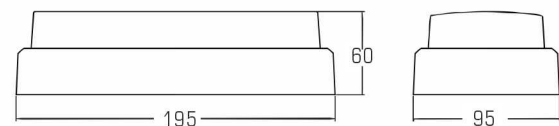

Order Code	Watts	Beam Angle	CCT	CRI	Size(mm)
HB195-B1-D	12W	120°	2700K-6000K	80/90/97	L195*W95*H60
HB225-B1-D	15W	120°	2700K-6000K	80/90/97	L225*W100*H55
HB195-B1-DF	12W	120°	2700K-6000K	80/90/97	L195*W95*H60
HB225-B1-DF	15W	120°	2700K-6000K	80/90/97	L225*W100*H55

B2

LED Bulkhead light





B2-D Series



B2-DF Series

LED Chip:Epistar/San'an SMD
Lm/w:85-100lm/w
Material: PC +ABS

IP65

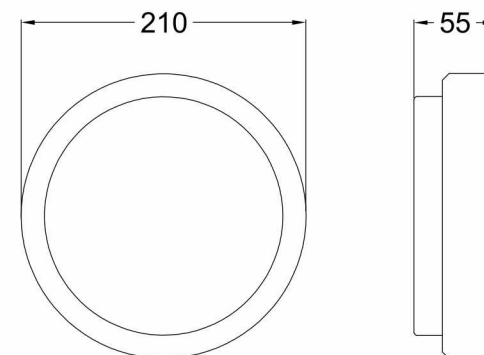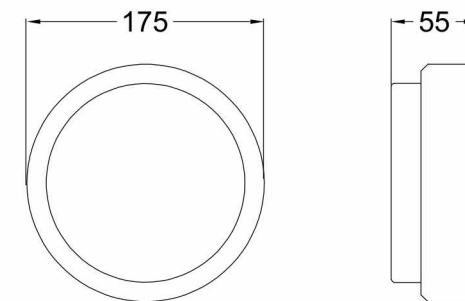

Order Code	Watts	Beam Angle	CCT	CRI	Size(mm)
HB175-B2-D	12W	120°	2700K-6000K	80/90/97	D175*H55
HB210-B2-D	15W	120°	2700K-6000K	80/90/97	D210*H55
HB175-B2-DF	12W	120°	2700K-6000K	80/90/97	D175*H55
HB210-B2-DF	15W	120°	2700K-6000K	80/90/97	D210*H55


B3

LED Bulkhead light



LED Chip:Epistar/San'an SMD
Lm/w:85-100lm/w
Material: Die-casting aluminium +PC

IP65

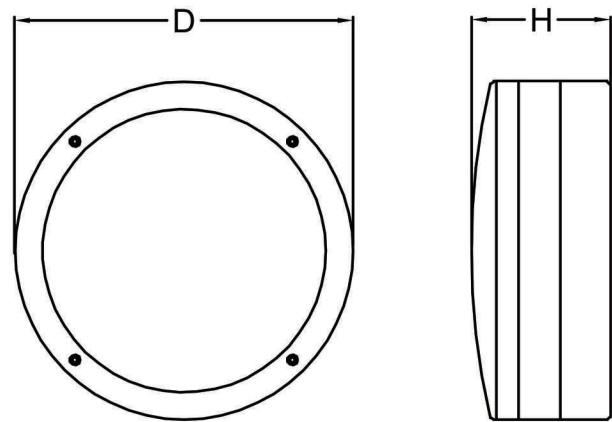

Order Code	Watts	Beam Angle	CCT	CRI	Size(mm)
HB220-B3-F	15W	120°	2700K-6000K	80/90/97	D220*H90
HB275-B3-F	20W	120°	2700K-6000K	80/90/97	D275*H100
HB300-B3-F	30W	120°	2700K-6000K	80/90/97	D300*H100
HB350-B3-F	40W	120°	2700K-6000K	80/90/97	D350*H105
HB400-B3-F	50W	120°	2700K-6000K	80/90/97	D400*H100

B4

LED Bulkhead light



Series:C





Series:G



Series:H

LED Chip:Epistar/San'an SMD
Lm/w:85-100lm/w
Material: Die-casting aluminium +PC

IP65

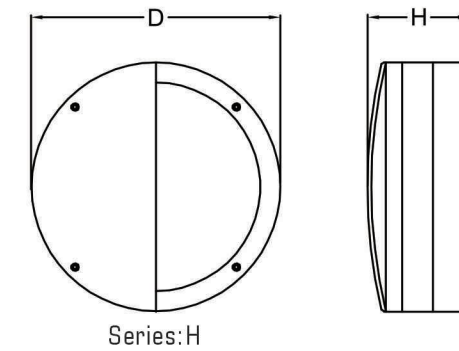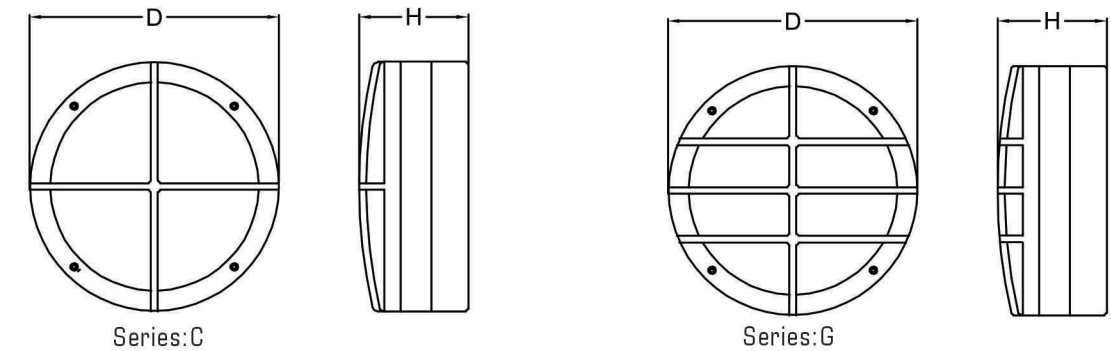

Order Code	Watts	Beam Angle	CCT	CRI	Size(mm)
HB220-B4-C/H/G	15W	120°	2700K-6000K	80/90/97	D220*H90
HB275-B4-C/H/G	20W	120°	2700K-6000K	80/90/97	D275*H100
HB300-B4-C/H/G	30W	120°	2700K-6000K	80/90/97	D300*H100
HB350-B4-C/H/G	40W	120°	2700K-6000K	80/90/97	D350*H105

B5

LED Bulkhead light



Series:G



Series:Y

LED Chip:Epistar/San'an SMD
Lm/w:85-100lm/w
Material: Die-casting aluminium +PC

IP65


B6

LED Bulkhead light





LED Chip:Epistar/San'an SMD
Lm/w:85-100lm/w
Material: Die-casting aluminium +PC




IP65

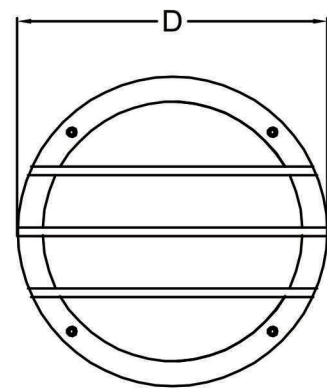

Series:G

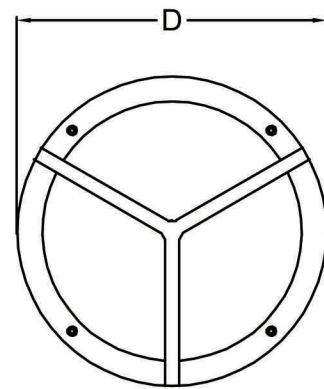

Series:Y

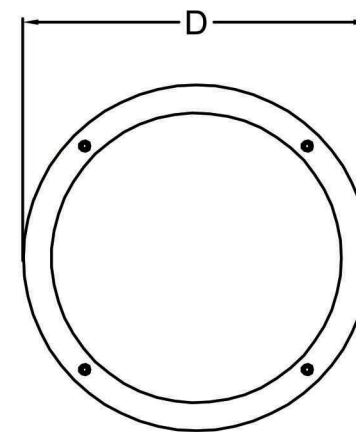


Order Code	Watts	Beam Angle	CCT	CRI	Size(mm)
HB220-B5-G/Y	15W	120°	2700K-6000K	80/90/97	D220*H90
HB275-B5-G/Y	20W	120°	2700K-6000K	80/90/97	D275*H100
HB300-B5-Y	30W	120°	2700K-6000K	80/90/97	D300*H100

Order Code	Watts	Beam Angle	CCT	CRI	Size(mm)
HB145-B6-F	7W	120°	2700K-6000K	80/90/97	D145*H65
HB220-B6-F	15W	120°	2700K-6000K	80/90/97	D220*H75
HB275-B6-F	20W	120°	2700K-6000K	80/90/97	D275*H85
HB300-B6-F	30W	120°	2700K-6000K	80/90/97	D300*H85
HB350-B6-F	40W	120°	2700K-6000K	80/90/97	D350*H85
HB400-B6-F	50W	120°	2700K-6000K	80/90/97	D400*H85


B7

LED Bulkhead light

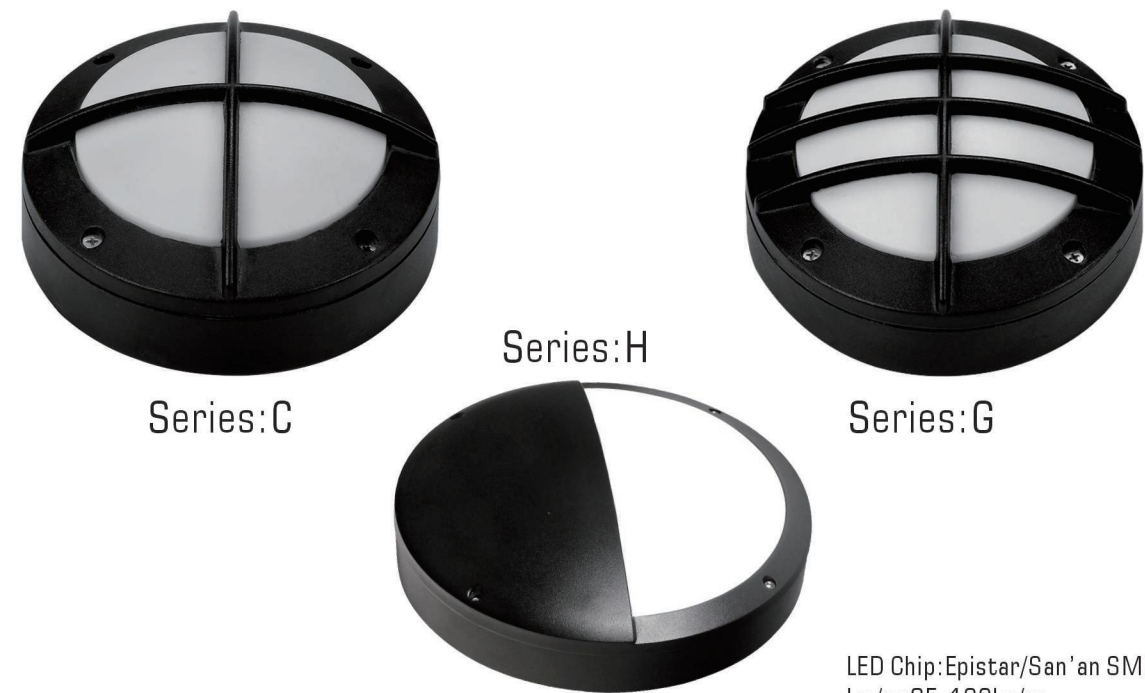

IP65

LED Chip:Epistar/San'an SMD
Lm/w:85-100lm/w
Material: Die-casting aluminium + PC

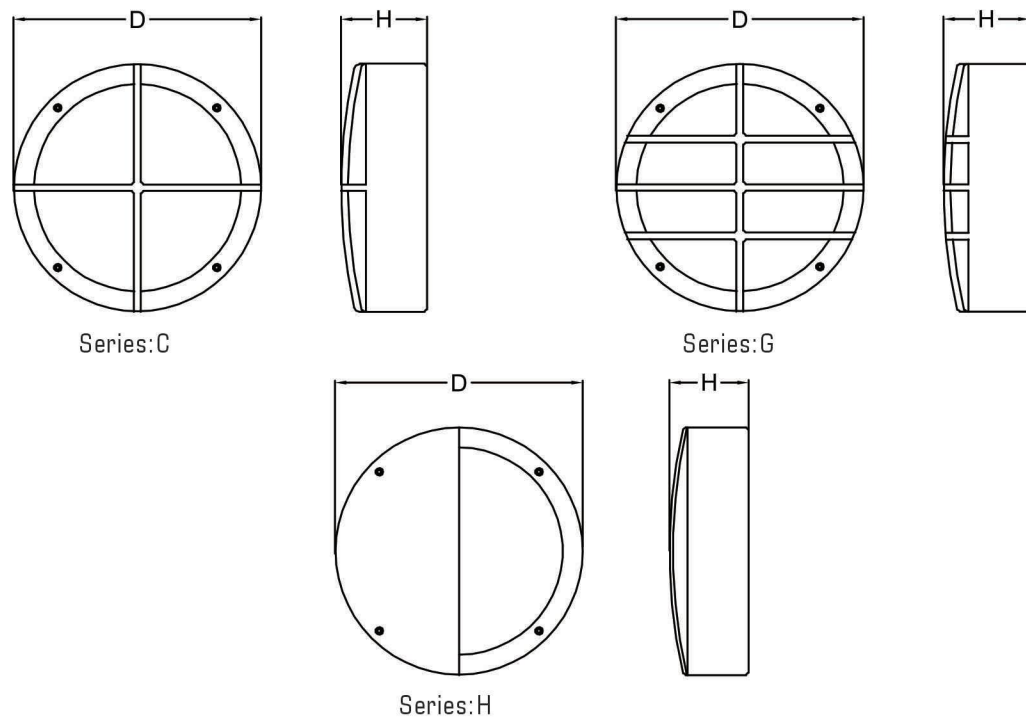

Order Code	Watts	Beam Angle	CCT	CRI	Size(mm)
HB145-B7-C/G/H	7W	120°	2700K-6000K	80/90/97	D145*H65
HB220-B7-C/G/H	15W	120°	2700K-6000K	80/90/97	D220*H75
HB275-B7-C/G/H	20W	120°	2700K-6000K	80/90/97	D275*H85
HB300-B7-C/G/H	30W	120°	2700K-6000K	80/90/97	D300*H85
HB350-B7-C/G/H	40W	120°	2700K-6000K	80/90/97	D350*H85



B8

LED Bulkhead light



IP65


LED Chip:Epistar/San'an SMD
Lm/w:85-100lm/w
Material: Die-casting aluminium + PC

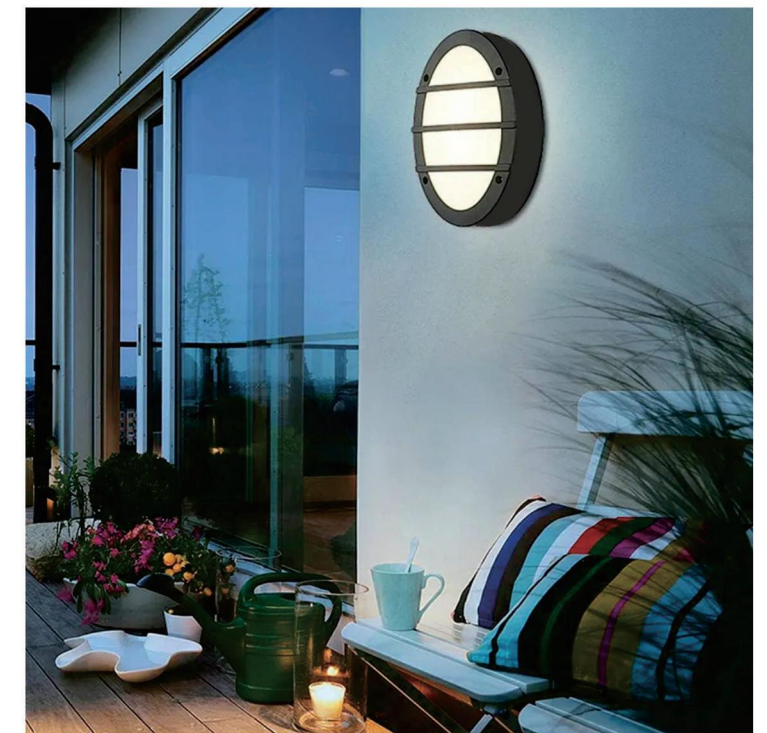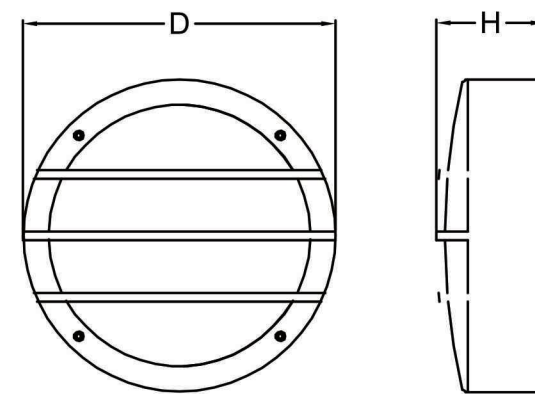

Order Code	Watts	Beam Angle	CCT	CRI	Size(mm)
HB145-B8-G	7W	120°	2700K-6000K	80/90/97	D145*H65
HB220-B8-G	15W	120°	2700K-6000K	80/90/97	D220*H75
HB275-B8-G	20W	120°	2700K-6000K	80/90/97	D275*H85
HB300-B8-G	30W	120°	2700K-6000K	80/90/97	D300*H85


B9

LED Bulkhead light

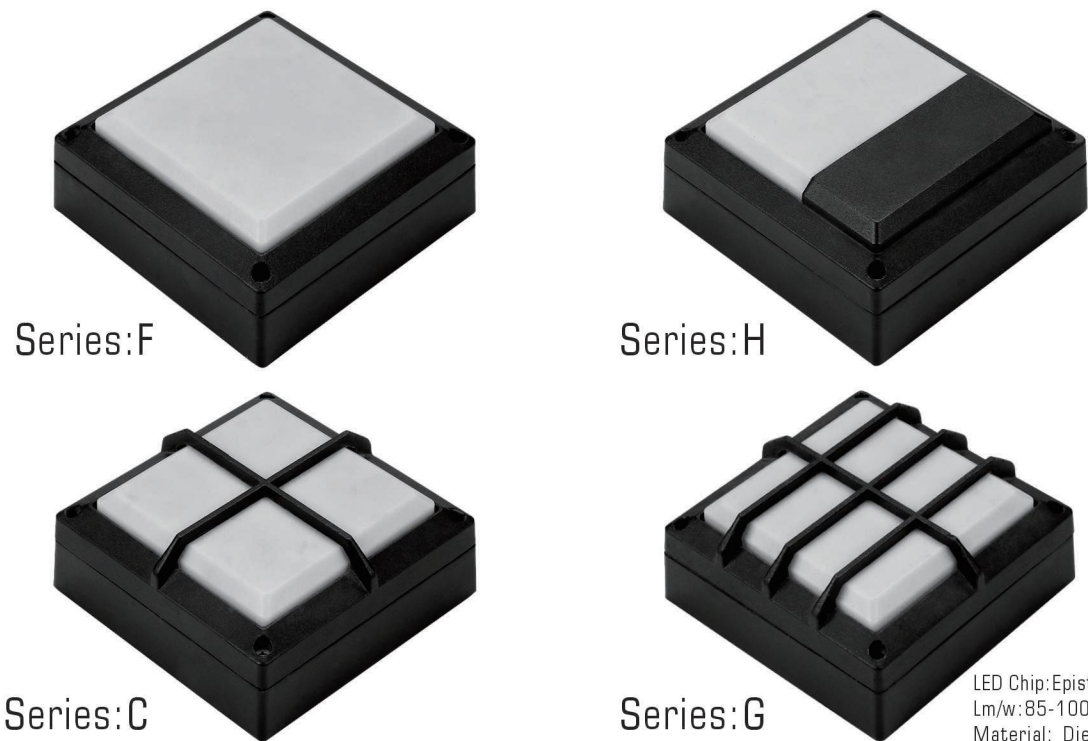

LED Chip:Epistar/San'an SMD
Lm/w:85-100lm/w
Material: Die-casting aluminium +PC


IP65

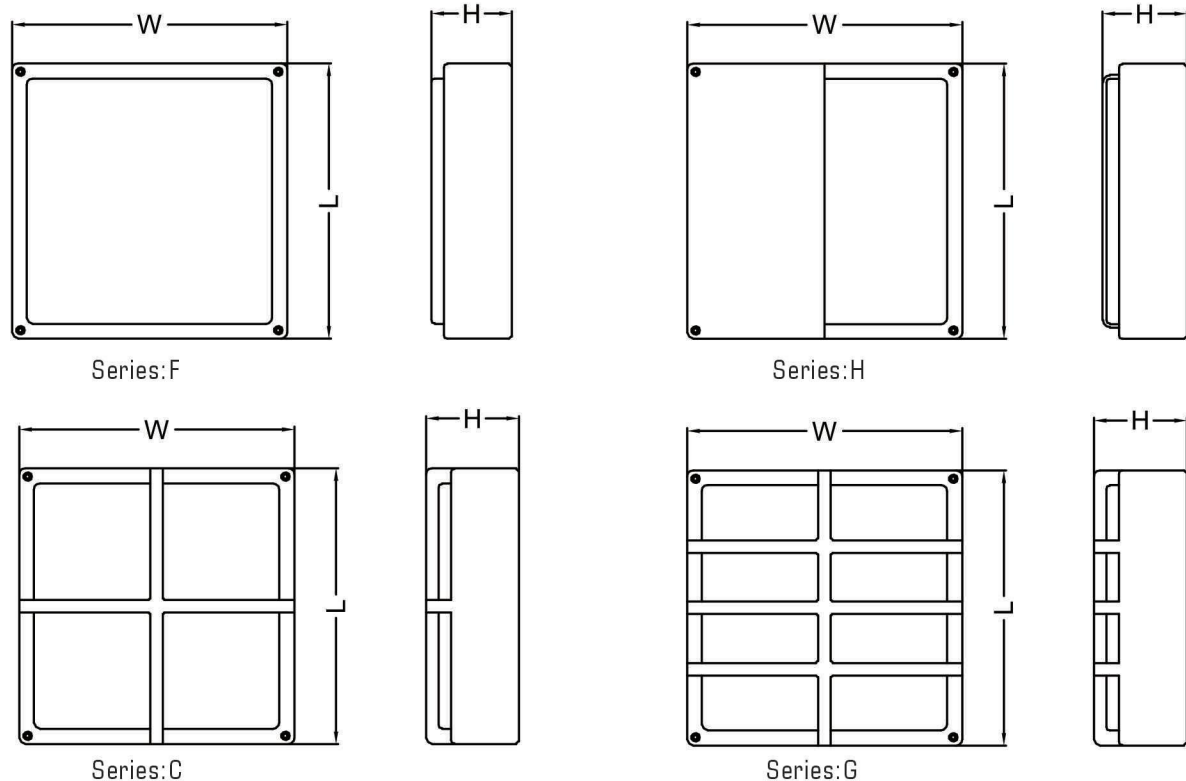

Order Code	Watts	Beam Angle	CCT	CRI	Size(mm)
HB145-B9-C/F/G/H	7W	120°	2700K-6000K	80/90/97	L145*W145*H65
HB220-B9-C/F/G/H	15W	120°	2700K-6000K	80/90/97	L220*W220*H80
HB275-B9-C/F/G/H	20W	120°	2700K-6000K	80/90/97	L275*W275*H85


B10

LED Bulkhead light

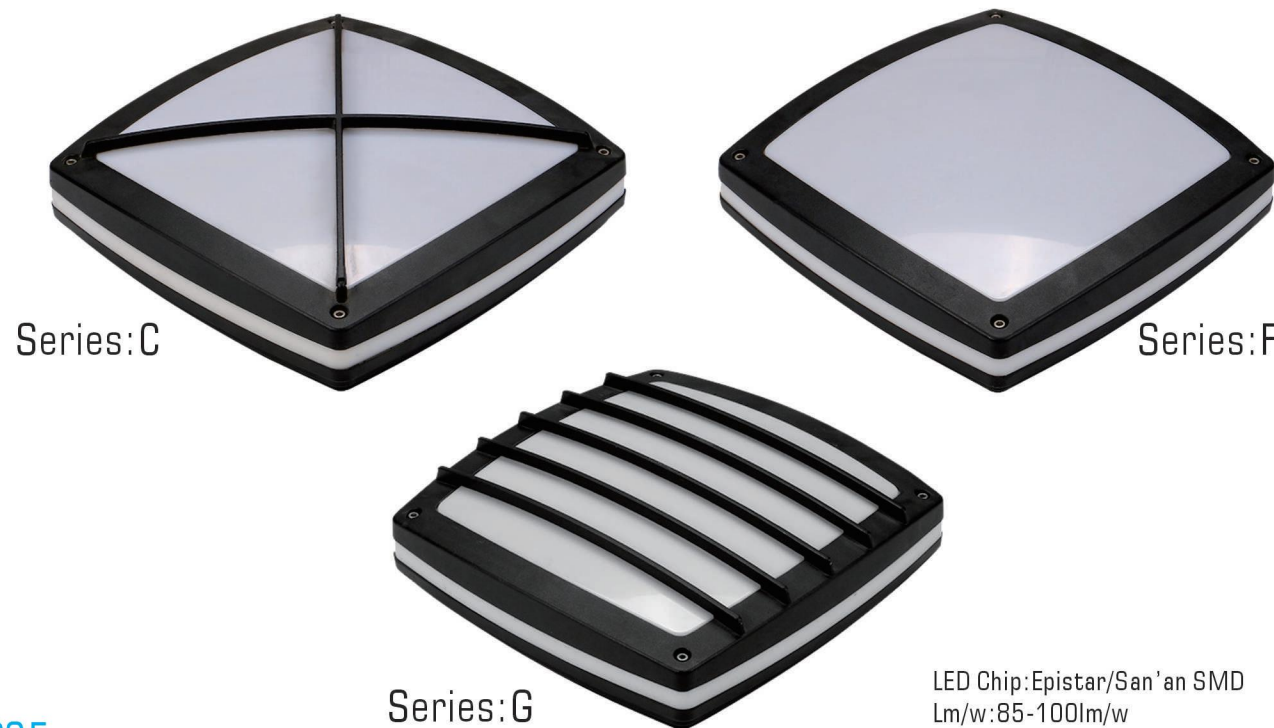

LED Chip:Epistar/San'an SMD
Lm/w:85-100lm/w
Material: Die-casting aluminium +PC

IP65

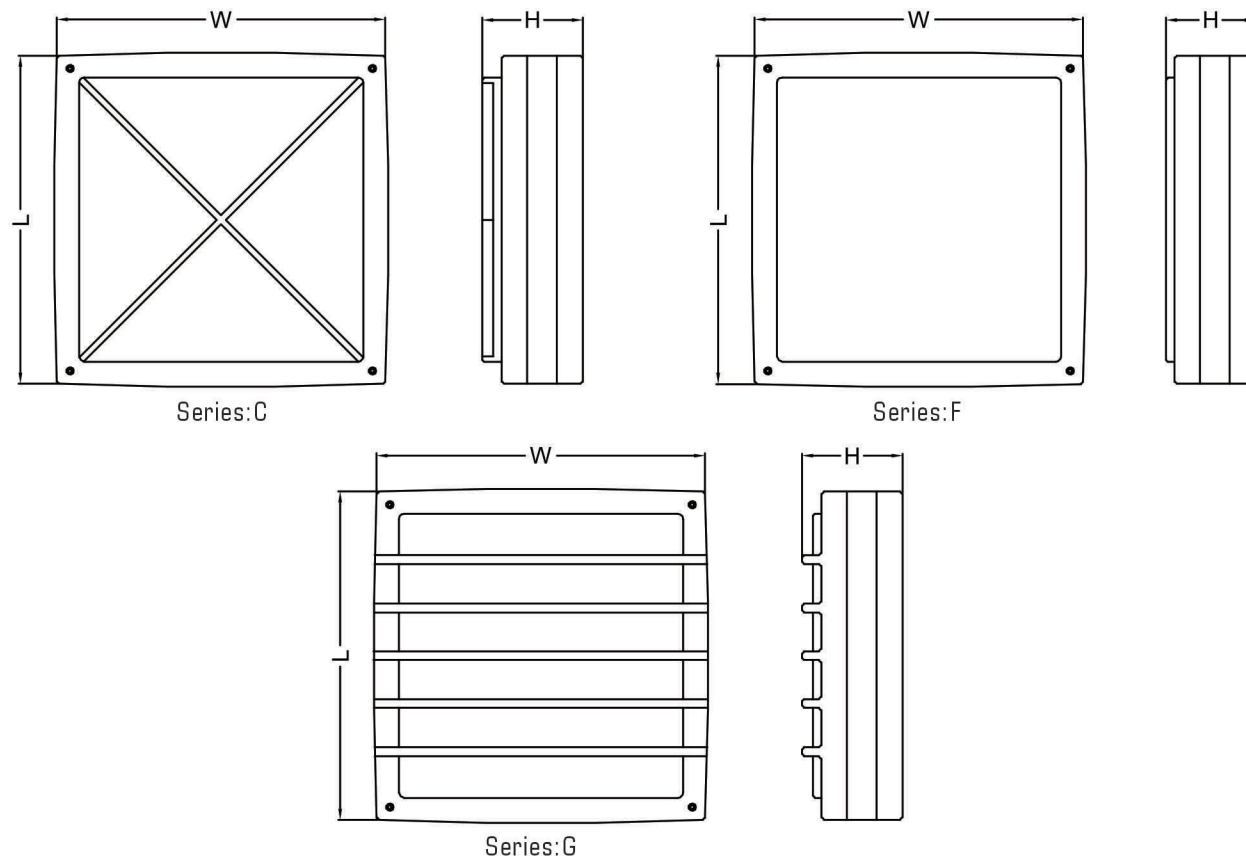

Order Code	Watts	Beam Angle	CCT	CRI	Size(mm)
HB300-B10-C/F/G	30W	120°	2700K-6000K	80/90/97	L300*W300*H100